

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

WAY

STEP LIGHT WITH PIR MOTION SENSOR & PHOTOCELL

ORDERING INFORMATION

Order code: 69754
Model number: ASWA-V-3W-A-30BK-MS-P
UPC: 069549029750
Case quantity: 18

PHYSICAL DATA

Size in. (cm): 3 (7.6) x 4 3/4 (12)
Lens material: Acrylic lens with frosted finish
Housing material: Durable die-cast aluminum housing
Housing finish: Black
Mounting: Recessed wall-mounted, vertical
Sensor: Integrated PIR motion sensor & photocell
Daisy chain: Up to 20 fixtures

PERFORMANCE DATA


Watts (W): 3
Volts (V AC): 120
Color temperature (K)¹: 3 000
Initial lumen output (lm)²: 90
Efficacy (lm/W)³: 30
CRI: 90+
Life L70 (h)⁴: 50 000
Power factor: ≥0.90
Frequency (Hz): 60
Operating temp. range: -30 °C to 40 °C (-22 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %.

² Total lumen values. Lumen range: +/- 10%.

³ Efficacy is derived from initial lumen output value.

⁴ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

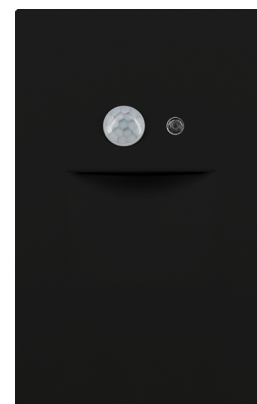

5
 yrs
warranty



**quick
 ship**



**LED
 fixture**

66

**wet
 location**




**ICES
 005**



Intertek


This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS AND WEIGHT

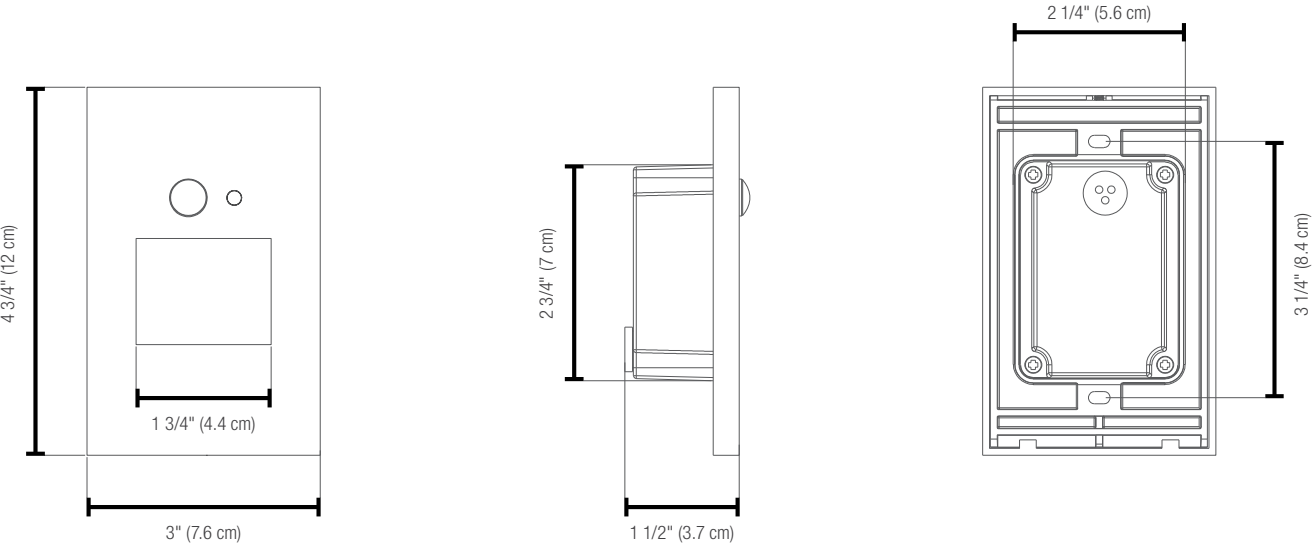


Net weight (lbs)	0.46
------------------	------

SPACING RECOMMENDATION¹

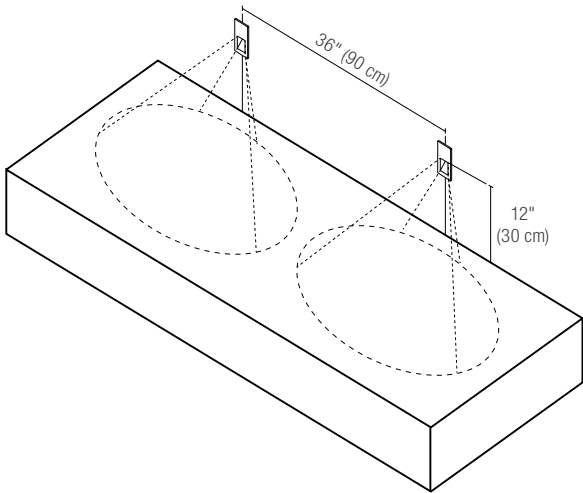

¹ Drawing is for reference only. Step light model may vary.

LIGHT SPREAD

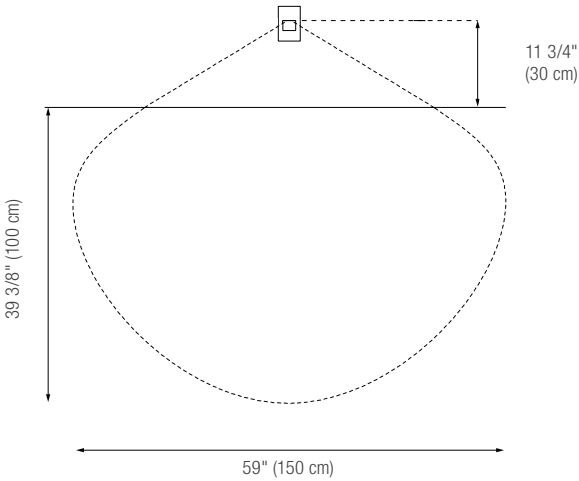

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.


Name: _____
Company: _____
Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

STEP LIGHT WITH PIR MOTION SENSOR & PHOTOCELL

Detection Area

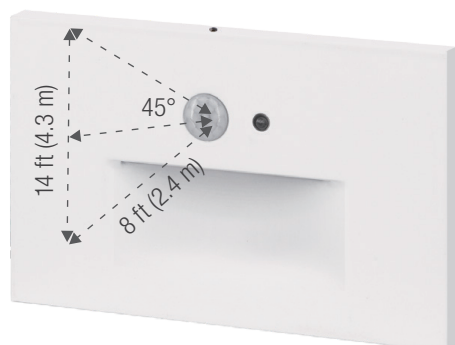

PIR Motion Sensor & Photocell Function¹



During the daytime, the light will not turn ON as it is too bright to trigger the photocell.



During the nighttime, if motion is not detected, the light will not turn ON.



If motion is detected, the light will remain OFF.



If motion is detected, the light will automatically turn ON. (1 min. hold time)

¹ Luminaires are not programmable, PIR Motion Sensor & Photocell Function is standard and cannot be disabled.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.