

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# WAY

## STEP LIGHT WITH PIR MOTION SENSOR & PHOTOCELL

### ORDERING INFORMATION

**Order code:** 69755  
**Model number:** ASWA-V-3W-A-30WH-MS-P  
**UPC:** 069549029767  
**Case quantity:** 18

### PHYSICAL DATA

**Size in. (cm):** 3 (7.6) x 4 3/4 (12)  
**Lens material:** Acrylic lens with frosted finish  
**Housing material:** Durable die-cast aluminum housing  
**Housing finish:** White  
**Mounting:** Recessed wall-mounted, vertical  
**Sensor:** Integrated PIR motion sensor & photocell  
**Daisy chain:** Up to 20 fixtures

### PERFORMANCE DATA

**Watts (W):** 3  
**Volts (V AC):** 120  
**Color temperature (K)<sup>1</sup>:** 3 000  
**Initial lumen output (lm)<sup>2</sup>:** 90  
**Efficacy (lm/W)<sup>3</sup>:** 30  
**CRI:** 90+  
**Life L70 (h)<sup>4</sup>:** 50 000  
**Power factor:** ≥0.90  
**Frequency (Hz):** 60  
**Operating temp. range:** -30 °C to 40 °C (-22 °F to 104 °F)

<sup>1</sup> Typical colour temperature range: +/- 5 %.

<sup>2</sup> Total lumen values. Lumen range: +/- 10%.

<sup>3</sup> Efficacy is derived from initial lumen output value.

<sup>4</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.



**5**  
 yrs  
**warranty**



**quick  
 ship**



**LED  
 fixture**



**wet  
 location**




**ICES  
 005**



**Intertek**


This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS AND WEIGHT

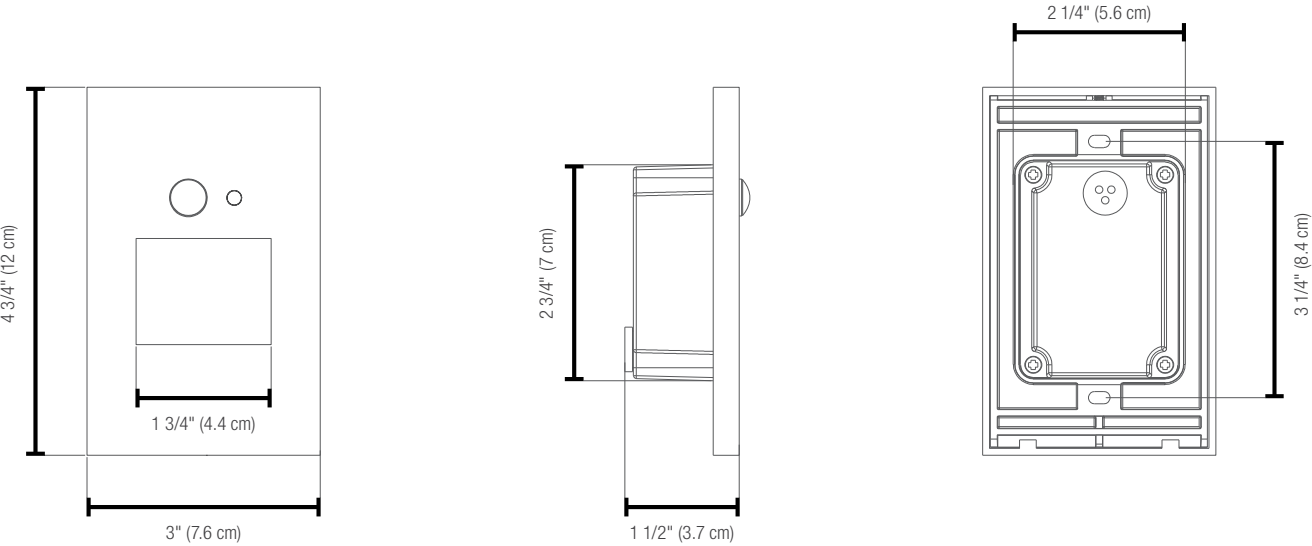


Net weight (lbs)	0.46
------------------	------

SPACING RECOMMENDATION<sup>1</sup>

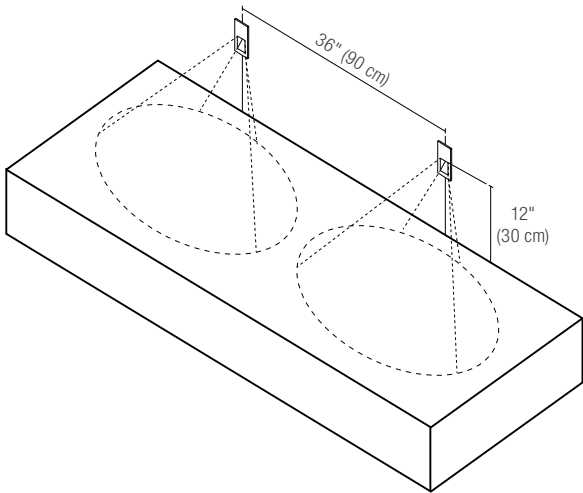

<sup>1</sup> Drawing is for reference only. Step light model may vary.

LIGHT SPREAD

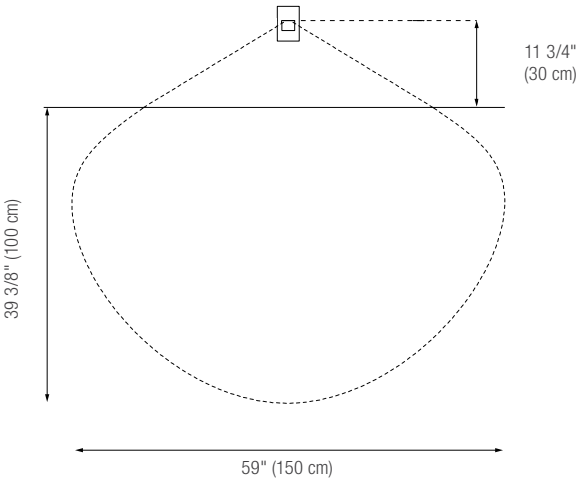

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.


Name: \_\_\_\_\_  
Company: \_\_\_\_\_  
Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

## STEP LIGHT WITH PIR MOTION SENSOR & PHOTOCELL

### Detection Area

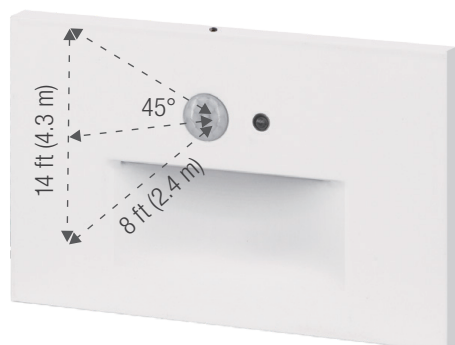

### PIR Motion Sensor & Photocell Function<sup>1</sup>



During the daytime, the light will not turn ON as it is too bright to trigger the photocell.



During the nighttime, if motion is not detected, the light will not turn ON.



If motion is detected, the light will remain OFF.



If motion is detected, the light will automatically turn ON. (1 min. hold time)

<sup>1</sup> Luminaires are not programmable, PIR Motion Sensor & Photocell Function is standard and cannot be disabled.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.