

Project : \_\_\_\_\_ Type : \_\_\_\_\_  
 Drawn by : \_\_\_\_\_ Catalogue # : \_\_\_\_\_ Date : \_\_\_\_\_

## Individual Spec Sheet

# L3PNX

## SMART LED BACKLIT PANEL

Integrated Bluetooth® Mesh Technology

### ORDERING INFORMATION

**Order code:** 69633  
**Model number:** L3PNX-2LP40P-Q/TW-BT  
**UPC:** 069549028456  
**Case quantity:** 2  
**DLC unique ID:** S-2M12YH (Ambient Lighting) / S-LFTWK (Low-Bay)

### PHYSICAL DATA

**Size (ft):** 2x2  
**Lens material:** PMMA  
**Housing material:** Aluminum  
**Mounting:** Recessed, suspended or surface

### PERFORMANCE DATA

**Watts:** Power Selectable Up to 40 W  
**Volts (VAC):** 120-347  
**Color temperature (K):** Tunable White - 3 000 K to 5 000 K  
**Lumen output (lm):** 5 000  
**Efficacy (lm/W):** 125  
**CRI:** 80+  
**Life L70 (h):** 120 000  
**Tested LM-80 (h):** 9 000  
**Dimming:** Wireless Bluetooth® Dimming (1% - 100%)  
**Power factor:** 0.90  
**THD (%):** <20  
**Frequency (Hz):** 50/60  
**Surge protection (kV):** 2  
**Input current (A):** 0.333-0.115  
**Operating temp. range:** -20 °C to 45 °C (-4 °F to 113 °F)

<sup>1</sup> Typical color temperature range: +/- 5 %.  
<sup>2</sup> Lumen values are derived from DLC reported data at 3 000 K. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.  
<sup>3</sup> Life hours are derived from IESNA LM80 testing report and projected per IESNA TM-21 extrapolations.

### LUMEN SPECIFICATION TABLE

Watts (W)	3 000 K		3 500 K		4 000 K		5 000 K	
	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
40	5 000	125	5 000	125	5 000	125	5 000	125

#### DEFAULT PROGRAMMING

40 W / 5 000 K

This lighting equipment meets requirements of ICES-005 issue 5 class A for use in commercial applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Not all products are qualified on the DLC QPL.  
 To view our DLC qualified products, please  
 consult the DLC Qualified Products  
 List at [www.designlights.org/search](http://www.designlights.org/search).

### ACCESSORIES (order separately)

Order code	Type
67164	Drywall Kit
68456	Surface Mount Kit
68458	Suspension Kit

### SMART ACCESSORIES (order separately)

Order code	Type
69731	Plug-In PIR Motion Sensor

### PLUG-IN PIR MOTION SENSOR





### SENSOR SETTING OPTIONS<sup>1</sup>

Parameter	Settings Options
1st Time Delay	1 min - 59 min, ∞
2nd Time Delay	1 min - 59 min, ∞
Dim Level	1% - 100%


<sup>1</sup> For detailed sensor programming and settings information, please refer to the Genio App Instruction Guide.

### SENSOR MOUNTING AND DETECTION RANGE

Mounting Height	15 ft (4.6 m) Max.
Detection Range	32 ft (9.75 m) Max.

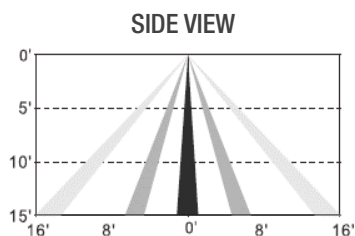

### DIMENSIONS AND WEIGHTS

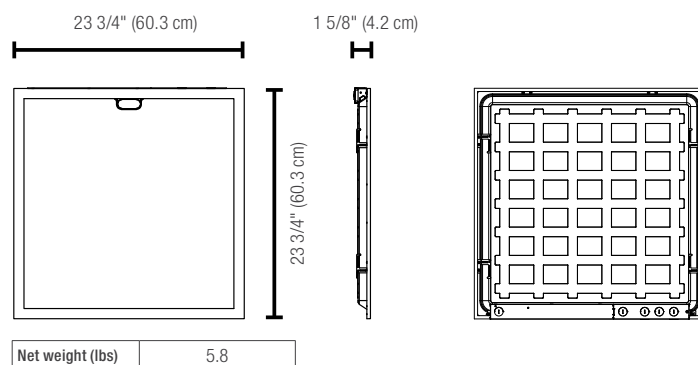


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

**PHOTOMETRIC DATA<sup>1</sup>**

**69633 • L3PNX-2LP40P-Q/TW-BT • 40 W • 4 000 K • 5 169.7 lm**

**Polar candela distribution**

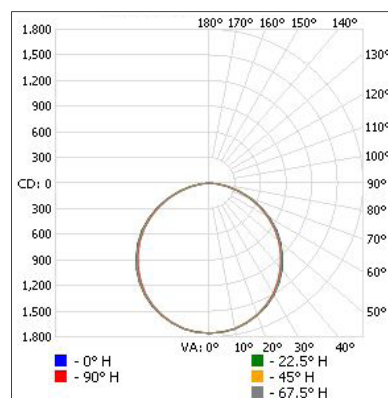

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	1 370.6	26.5
0-40	2 253.5	43.6
0-60	4 020.0	77.8
60-90	1 134.3	21.9
70-100	488.5	9.5
90-120	5.2	0.1
0-90	5 154.3	99.7
90-180	15.3	0.3
0-180	5 169.7	100

**Illuminance at a distance**

Center beam fc		Beam width	
2.0'	439.0 fc	6.4'	6.1'
4.0'	109.7 fc	12.8'	12.2'
6.0'	48.8 fc	19.2'	18.4'
8.0'	27.4 fc	25.6'	24.5'
10.0'	17.6 fc	32.0'	30.6'

■ Vert. spread : 115.9°  
■ Horiz. spread : 113.7°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

## GENIO CONTROL SYSTEM FEATURES

Genio is Stanpro's smart brand of lighting and emergency lighting. Integrating the latest in Bluetooth® Mesh technology, Genio products allow for customizable features that can be adjusted at your fingertips using a smartphone or other compatible devices. This system is easy to use, versatile and futureproof! Please see below for some of the key features<sup>1</sup> of the Genio control system:



### LIGHTS

Instantly control the color temperature, wattage, lumen output and dimming.



### GROUPS

Easily group luminaires together and control them as a single unit.



### SCENES

Customize your lighting through scenes and create different atmospheres for occasions and activities.



### SCHEDULES


Set schedules to specify dates, times and recurrence patterns for changing the settings of your lighting.



### SENSOR

Adjust the PIR motion sensor and daylight harvesting settings.

\* PIR motion sensor accessory sold separately

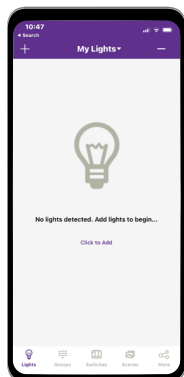

### Lights

- Add
- Name or Rename
- Dimming and Color Tuning
- Delete
- Sensor Settings




### Groups

- Create
- Rename
- Delete
- Add or Remove Lights
- Adjust Group Linkage Level
- Turn On/Off
- Adjust Group Dimming
- Activate Auto Mode



### Scenes

- Create
- Edit
- Delete

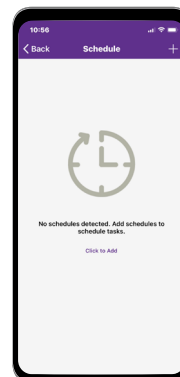

### Schedules

- Creating
- Associate a Schedule To Lights, Groups, or Scenes
- Set a Repeating
- Set Fade Time
- Delete
- Enable Or Disable



Download on the  
**App Store**

GET IT ON  
**Google Play**



Download our App  
**Instruction Guide**

<sup>1</sup> Please note that the features mentioned are part of a broader range of characteristics relating to the Genio Ecosystem and may not be applicable to this specific product. Customers are advised to review the product specifications carefully to understand their capabilities.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Ascot Capital Group is under license. Other trademarks and trade names are those of their respective owners.