

## Individual Spec Sheet

# L2STR

## LED STRIP

3 CCT and 3 Power Selectable

### ORDERING INFORMATION

**Order Code:** 69995  
**Model Number:** L2STR-48LP45-Q/3C-BK  
**UPC:** 069549031524  
**Case Quantity:** 6  
**DLC Unique ID:** S-GCWVPJ<sup>1</sup> (DLC Premium) / S-13M4CK<sup>2</sup> & S-QY3682<sup>3</sup> (DLC Standard)

### PHYSICAL DATA

**Length in. (cm):** 47 3/8 (120.34)  
**Lens Material:** Frosted PMMA  
**Housing Material:** 24 gauge matte black powder painted steel  
**Mounting:** Surface, suspended or row mounted (V-Hooks and junction box cover included)

### PERFORMANCE DATA

**Watts (W):** 34/38/45  
**Volts (V AC):** 120-347  
**Color Temperature (K)<sup>1</sup>:** 3 500/4 000/5 000  
**Lumen Output (lm)<sup>2</sup>:** 4 964/5 434/6 300  
**Efficacy (lm/W):** 140  
**CRI:** 80+  
**Life L70 (hrs)<sup>3</sup>:** 156 000  
**Tested LM-80 (hrs)<sup>3</sup>:** 9 000  
**Dimming:** 0-10 V with 12 V auxiliary output  
**Power Factor:** 0.90  
**THD (%):** 10  
**Frequency (Hz):** 50/60  
**Surge Protection (kV):** 2.5  
**Input Current (A):** 0.28-0.10/0.32-0.11/0.38-0.13  
**Operating Temp. Range:** -20 °C to 50 °C (-4 °F to 122 °F)

<sup>1</sup> Typical color temperature range: +/- 5 %.  
<sup>2</sup> Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.  
<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

### LUMEN SPECIFICATION TABLE

Watts (W)	3 500 K		4 000 K		5 000 K	
	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
34	4 624	136	4 964	146	4 624	136
38	5 054	133	5 434	143	5 054	133
45	5 850	130	6 300	140	5 850	130

#### DEFAULT PROGRAMMING

45 W / 4 000 K

This lighting equipment meets requirements of ICES-005 issue 5 class A for use in commercial applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Not all products are qualified on the DLC QPL.  
 To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).

<sup>1</sup> Stairwell And Passageway Luminaires  
<sup>2</sup> Direct Linear Ambient Luminaires  
<sup>3</sup> Low-Bay Luminaires for Commercial and Industrial Buildings

## ACCESSORIES (order separately)

Order code	Type
68676	Suspension kit - 2 chains (1m)
70219	10' Complete aircraft cable kit with 5-wire power feed and 2 canopies - Black
70283	10' Single side aircraft cable with canopy (non-power feed) - Black
69998	Continuous row mounting connector - Black
69398	Transparent end caps (set of 2)
69413	Wire guard kit 48" - White
69396	Replacement lens 48"

## INCLUDED IN THE BOX



V-Hooks



Junction Box Cover

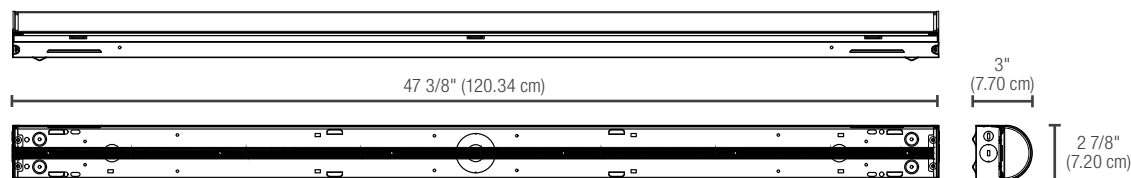
## COMPATIBLE DIMMERS<sup>1</sup>

Brand	Model
Leviton	IllumaTech IP710-LFZ DS710
Lutron	Maestro MS-Z101 Nova T NTSTV DIVA DVSTV
Legrand	RH4FBL3PW
Philips	Sunrise SR1200ZTUNV

Dimming range: 0%-100%

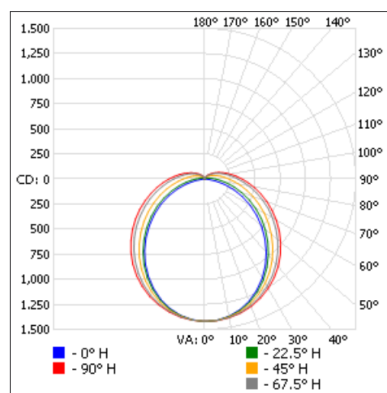
<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

## DIMENSIONS AND WEIGHT



Net weight (lbs)	4.4
------------------	-----

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

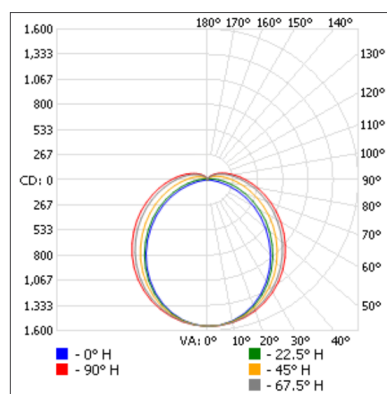
**PHOTOMETRIC DATA<sup>1</sup>**
**69995 • L2STR-48LP45-Q/3C-BK • 34 W • 4 000 K • 4 960.4 lm**
**Polar candela distribution**

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	1 095.5	22.1
0-40	1 791	36.1
0-60	3 193.6	64.4
60-90	1 280	25.8
70-100	901.9	18.2
90-120	389.3	7.8
0-90	4 473.7	90.2
90-180	486.8	9.8
0-180	4 960.4	100

**Illuminance at a distance**

	Center beam fc		Beam width
2.0'	354.9		4.9' 8.9'
4.0'	88.7		9.8' 17.9'
6.0'	39.4		14.7' 26.8'
8.0'	22.2		19.6' 35.8'
10.0'	14.2		24.5' 44.7'

■ Vert. spread: 101.7°  
■ Horiz. spread: 131.8°

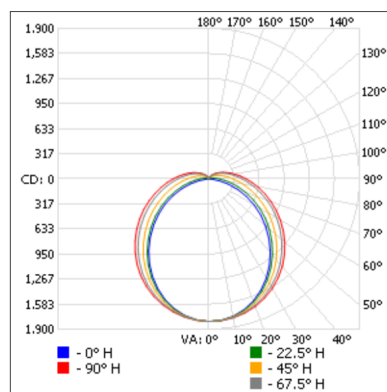
**69995 • L2STR-48LP45-Q/3C-BK • 38 W • 4 000 K • 5 430.1 lm**
**Polar candela distribution**

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	1 199.2	22.1
0-40	1 960.6	36.1
0-60	3 496	64.4
60-90	1 401.2	25.8
70-100	987.3	18.2
90-120	426.2	7.8
0-90	4 897.2	90.2
90-180	532.9	9.8
0-180	5 430.1	100

**Illuminance at a distance**

	Center beam fc		Beam width
2.0'	388.5		4.9' 8.9'
4.0'	97.1		9.8' 17.9'
6.0'	43.2		14.7' 26.8'
8.0'	24.3		19.6' 35.8'
10.0'	15.5		24.5' 44.7'

■ Vert. spread: 101.7°  
■ Horiz. spread: 131.8°

**69995 • L2STR-48LP45-Q/3C-BK • 45 W • 4 000 K • 6 295.5 lm**
**Polar candela distribution**

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	1390.3	22.1
0-40	2 273	36.1
0-60	4 053.2	64.4
60-90	1 624.5	25.8
70-100	1 144.7	18.2
90-120	494.1	7.8
0-90	5 677.7	90.2
90-180	617.8	9.8
0-180	6 295.5	100

**Illuminance at a distance**

	Center beam fc		Beam width
2.0'	450.4		4.9' 8.9'
4.0'	112.6		9.8' 17.9'
6.0'	50		14.7' 26.8'
8.0'	28.1		19.6' 35.8'
10.0'	18		24.5' 44.7'

■ Vert. spread: 101.7°  
■ Horiz. spread: 131.8°

<sup>1</sup> Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.