

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED REFLECTORS

DESIGN

PAR38

ORDERING INFORMATION

Order code: 70210
Model number: P38/S2/15W/30K/40/DESIGN/STD
UPC: 069549032637
Case quantity: 12

PHYSICAL DATA

Dimensions: MOL: 13 cm (5 1/8")
 DIA: 12.2 cm (4 3/4")
Shape: PAR38
Base: E26
Finish: Silver

PERFORMANCE DATA


Watts (W):	15	Beam angle (°):	40°
Traditional equivalent (W):	100	CBCP (cd):	1 895
Volts (V AC/DC):	120	Power factor:	≥0.7
Color temperature (K):	3 000	Input Current (mA):	165
Lumen output (lm):	1 200	Frequency (Hz):	60
Efficacy (lm/W):	80	Lens material:	Glass
CRI:	80	Housing Material:	Glass
Dimmable:	Triac dimming	Application:	Indoor
Life L70 (h):	25 000	Operating temp. range:	- 40 °C / - 40 °F to 45 °C / 113 °F

¹ Typical colour temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

DIMENSIONS

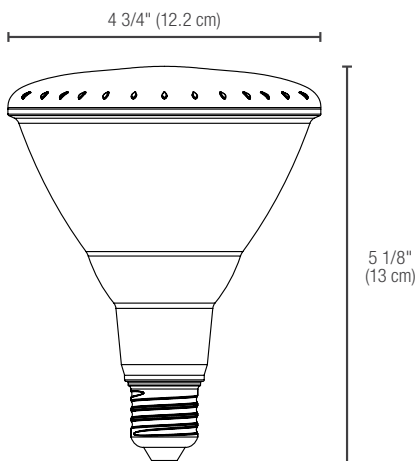

COMPATIBLE DIMMERS¹

Brand	Model
LUTRON	HCL453P, DVCL-153P, CTCL-153P, DVCL-153P, SELV-300P
COOPER	DAL06P
LEVITON	6615, DSM10-1LZ
LEGRAND	RH730PTUTC

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

Dimming performance might be impacted when using the above dimmers with only one lamp. Full performance achieved when using two or more lamps.



3 yrs
warranty

6'
wet
location

dimable

not suitable for
enclosed
fixture

ICES
005

