

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED REFLECTORS

DESIGN

GU10

ORDERING INFORMATION

Order code: 70213
Model number: GU10/S2/6W/40K/40/DESIGN/STD
UPC: 069549032668
Case quantity: 10/100

PHYSICAL DATA

Dimensions: MOL: 5.36 cm (2 1/8")
 DIA: 5 cm (2")
Shape: MR16
Base: GU10
Finish: Silver

PERFORMANCE DATA


Watts (W):	6	Beam angle (°):	40°
Traditional equivalent (W):	50	CBCP (cd):	670.5
Volts (V AC/DC):	120	Power factor:	≥0.7
Color temperature (K):	4 000	Input Current (mA):	80
Lumen output (lm):	525	Frequency (Hz):	60
Efficacy (lm/W):	75	Lens material:	Plastic
CRI:	80	Housing Material:	Glass
Dimmable:	Triac dimming	Application:	Indoor
Life L70 (h):	25 000	Operating temp. range:	- 40 °C / - 40 °F to 45 °C / 113 °F

¹ Typical colour temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

DIMENSIONS

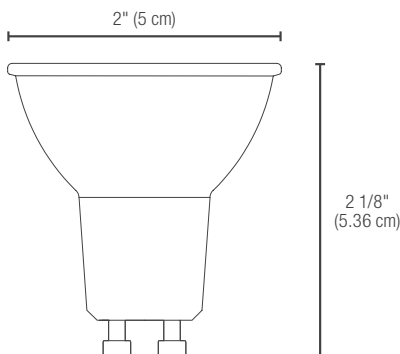

COMPATIBLE DIMMERS¹

Brand	Model
LUTRON	PD-6WCL, DVCL-153P, DVCL-253P, AYCL-253P, SELV-300P, MACL-153P
COOPER	SAL06P3
LEVITON	IPL06, 6674, DSL06-1LZ, DSM10-1LZ

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

Dimming performance might be impacted when using the above dimmers with only one lamp. Full performance achieved when using two or more lamps.



3 yrs
warranty

6
damp
location

dimable

**not suitable for
enclosed
fixture**

**ICES
005**



This lighting equipment meets requirements of ICES-005 issue 5 - class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.