

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LINIA

LED WALL SCENCE LUMINAIRE

5 CCT Selectable

ORDERING INFORMATION

Order code: 69699
Model number: SVANLI12-S15W-A-5CCH
UPC: 069549029200
Case quantity: 4

PHYSICAL DATA

Length in. (cm): 12 (30.5)
Lens material: PC lens with a frosted finish
Housing material: Aluminum housing
Housing finish: Chrome
Mounting: Wall mounted, surface

PERFORMANCE DATA

Watts (W): 15
Volts (V AC): 120
Color temperature (K)¹: 2 700/3 000/3 500/4 000/5 000
Lumen output (lm)²: 1 008
Efficacy (lm/W): 67
CRI: 90+
Life L70 (h)³: 72 000
Dimming: Phase cut (ELV / Triac) dimming standard
Power factor: ≥0.90
Frequency (Hz): 60
Operating temp. range: -20°C to 40°C (-4°F to 104°F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing at 3 000 K. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

LUMEN SPECIFICATION TABLE

Order code	Model number	Watts (W)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K	
			Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
69699	SVANLI12-S15W-A-5CCH	15	955	64	1 008	67	1 034	69	1 036	69	975	65

DEFAULT PROGRAMMING

3 000 K



quick
ship



LED
fixture



dimmable



damp
location



ICES
005



This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.




COMPATIBLE DIMMERS¹

Brand	Model
Legrand	RH730PTUTC
Cooper	DAL06P, AAL06, SAL06P3
Leviton	6615, 6674, DDMX1, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06
Lutron	AYCL-253P, CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, HCL453P, MACL-153P, PD-6WCL, SELV-300P

Dimming range: 10%-100%

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

DIMENSIONS AND WEIGHT

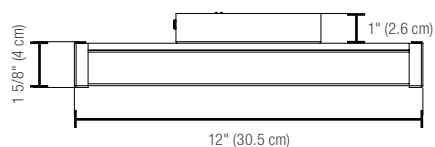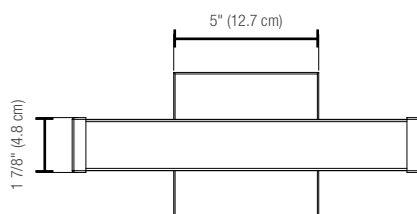


	12"
Net weight (lbs)	1.46

PHOTOMETRIC DATA¹

69699 • SVANLI12-S15W-A-5CCH • 15 W • 3 000 K • 1 008.3 lm

Polar candela distribution

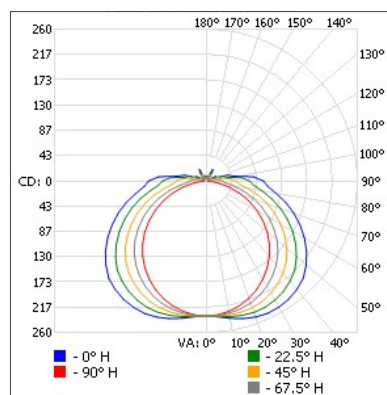

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	193.3	19.2
0-40	328.0	32.5
0-60	625.7	62.1
60-90	289.6	28.7
70-100	205.2	20.3
90-120	73.3	7.3
0-90	915.3	90.8
90-180	93.0	9.2
0-180	1,008.3	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	80.3	17.8'	4.7'
3.3'	21.3	34.5'	9.2'
5.0'	9.28	52.3'	13.9'
6.7'	5.17	70.1'	18.7'
8.3'	3.37	86.8'	23.1'
10.0'	2.32	104.6'	27.9'

Vert. spread: 158.3°
Horiz. spread: 108.7°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.