

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LINIA

## LED WALL SCONCE LUMINAIRE

5 CCT Selectable

### ORDERING INFORMATION

**Order code:** 69702  
**Model number:** SVANLI24-S24W-A-5CCH  
**UPC:** 069549029231  
**Case quantity:** 4

### PHYSICAL DATA

**Length in. (cm):** 24 1/8 (61.2)  
**Lens material:** PC lens with a frosted finish  
**Housing material:** Aluminum housing  
**Housing finish:** Chrome  
**Mounting:** Wall mounted, surface

### PERFORMANCE DATA

**Watts (W):** 24  
**Volts (V AC):** 120  
**Color temperature (K)<sup>1</sup>:** 2 700/3 000/3 500/4 000/5 000  
**Lumen output (lm)<sup>2</sup>:** 1 752  
**Efficacy (lm/W):** 73  
**CRI:** 90+  
**Life L70 (h)<sup>3</sup>:** 72 000  
**Dimming:** Phase cut (ELV / Triac) dimming standard  
**Power factor:** ≥0.90  
**Frequency (Hz):** 60  
**Operating temp. range:** -20°C to 40°C (-4°F to 104°F)

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing at 3 000 K. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

### LUMEN SPECIFICATION TABLE

| Order code | Model number         | Watts (W) | 2 700 K           |                 | 3 000 K           |                 | 3 500 K           |                 | 4 000 K           |                 | 5 000 K           |                 |
|------------|----------------------|-----------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|
|            |                      |           | Lumen output (lm) | Efficacy (lm/W) | Lumen output (lm) | Efficacy (lm/W) | Lumen output (lm) | Efficacy (lm/W) | Lumen output (lm) | Efficacy (lm/W) | Lumen output (lm) | Efficacy (lm/W) |
| 69702      | SVANLI24-S24W-A-5CCH | 24        | 1 703             | 71              | 1 752             | 73              | 1 837             | 77              | 1 830             | 76              | 1 743             | 73              |

#### DEFAULT PROGRAMMING

3 000 K



quick  
ship



LED  
fixture



dimmable



damp  
location



ICES  
005



This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


COMPATIBLE DIMMERS<sup>1</sup>

| Brand   | Model                                                                                          |
|---------|------------------------------------------------------------------------------------------------|
| Legrand | RH730PTUTC                                                                                     |
| Cooper  | DAL06P, AAL06, SAL06P3                                                                         |
| Leviton | 6615, 6674, DDMX1, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06                                      |
| Lutron  | AYCL-253P, CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, HCL453P, MACL-153P, PD-6WCL, SELV-300P |

**Dimming range:** 10%-100%

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

## DIMENSIONS AND WEIGHT

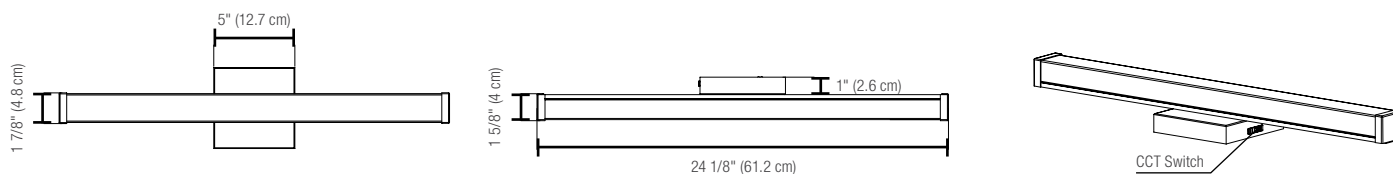


|                  |      |
|------------------|------|
|                  | 24"  |
| Net weight (lbs) | 1.98 |

PHOTOMETRIC DATA<sup>1</sup>

69702 • SVANLI24-S24W-A-5CCH • 24 W • 3 000 K • 1 751.8 lm

## Polar candela distribution

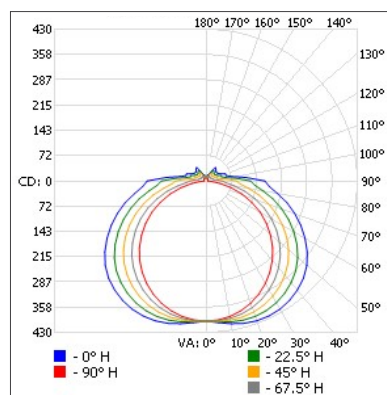

<sup>1</sup> Complete IES files available on our website.

## Zonal lumen summary

| Zone   | Lumens  | % Fixture |
|--------|---------|-----------|
| 0-30   | 330.5   | 18.9      |
| 0-40   | 558.9   | 31.9      |
| 0-60   | 1,062.9 | 60.7      |
| 60-90  | 492.9   | 28.1      |
| 70-100 | 341.4   | 19.5      |
| 90-120 | 129.9   | 7.4       |
| 0-90   | 1,555.8 | 88.8      |
| 90-180 | 196.0   | 11.2      |
| 0-180  | 1,751.8 | 100       |

## Illuminance at a distance

| Center beam fc |      | Beam width |       |
|----------------|------|------------|-------|
| 1.7'           | 138  | 17.7'      | 4.9'  |
| 3.3'           | 36.5 | 34.4'      | 9.5'  |
| 5.0'           | 15.9 | 52.2'      | 14.4' |
| 6.7'           | 8.86 | 69.9'      | 19.3' |
| 8.3'           | 5.77 | 86.6'      | 23.9' |
| 10.0'          | 3.98 | 104.4'     | 28.8' |

■ Vert. spread: 158.3°  
■ Horiz. spread: 110.4°

| Qty | Description | Price |
|-----|-------------|-------|
|     |             |       |

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.