

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED REFLECTORS

CHOICE

PAR20

ORDERING INFORMATION

Order code: 70251
Model number: P20/S3/7W/40K/40/CHOICE/STD
UPC: 069549033191
Case quantity: 12

PHYSICAL DATA

Dimensions: MOL: 81 mm (3 1/4")
 DIA: 63 mm (2 1/2")
Shape: PAR20
Base: E26
Finish: Lens: Clear

PERFORMANCE DATA


Watts (W):	7	Beam angle (°):	40°
Traditional equivalent (W):	50	CBCP (cd):	874
Volts (V AC/DC):	120	Power factor:	0.7
Color temperature (K)¹:	4 000	Input Current (mA):	75
Lumen output (lm)²:	500	Frequency (Hz):	60
Efficacy (lm/W):	70	Lens material:	Plastic
CRI:	90	Housing Material:	Plastic
Dimmable	Yes	Application:	Indoor
Life L70 (h)³:	25 000	Operating temp. range:	-40 °C / -40 °F to 45 °C / 113 °F

¹ Typical colour temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

DIMENSIONS

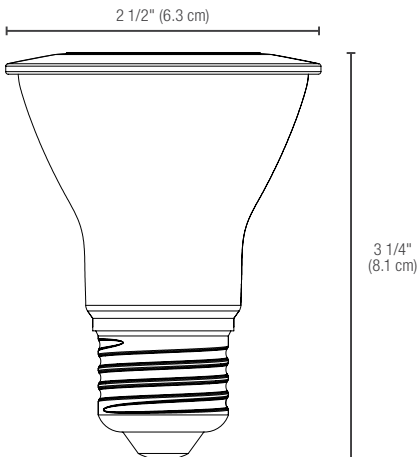

COMPATIBLE DIMMERS¹

Brand	Model
LUTRON	PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, MACL-153P
COOPER	AAL06, SAL06P3
LEVITON	DSM10-1LZ, DDMX1

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

Dimming performance might be impacted when using the above dimmers with only one lamp. Full performance achieved when using two or more lamps.



3^{yrs}
warranty

dimmmable

wet location



enclosed fixture



ICES 005

RHS



FC