

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LED REFLECTORS

## CHOICE

GU5.3

### ORDERING INFORMATION

**Order code:** 70265  
**Model number:** MR16/S4/12V/7W/30K/40/CHOICE/STD  
**UPC:** 069549033337  
**Case quantity:** 24

### PHYSICAL DATA

**Dimensions:** MOL: 49.7 mm (2")  
 DIA: 50 mm (1 32/32")  
**Shape:** MR16  
**Base:** GU5.3  
**Finish:** Lens: Frosted

### PERFORMANCE DATA


<b>Watts (W):</b>	7	<b>Beam angle (°):</b>	40°
<b>Traditional equivalent (W):</b>	50	<b>CBCP (cd):</b>	976
<b>Volts (V AC/DC):</b>	12	<b>Power factor:</b>	≥0.7
<b>Color temperature (K)<sup>1</sup>:</b>	3 000	<b>Input Current (mA):</b>	650
<b>Lumen output (lm)<sup>2</sup>:</b>	500	<b>Frequency (Hz):</b>	60
<b>Efficacy (lm/W):</b>	71	<b>Lens material:</b>	Plastic
<b>CRI:</b>	80	<b>Housing Material:</b>	Aluminum, Plastic
<b>Dimmable</b>	Yes	<b>Application:</b>	Indoor
<b>Life L70 (h)<sup>3</sup>:</b>	25 000	<b>Operating temp. range:</b>	-40 °C / -40 °F to 45 °C / 113 °F

<sup>1</sup> Typical colour temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

### DIMENSIONS

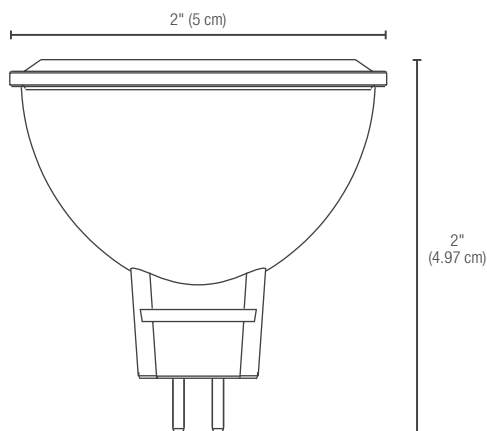

**3**  
 yrs  
 warranty



dimmmable

6

damp  
 location



ICES  
 005



not suitable for  
 enclosed  
 fixture

**RoHS**



**FC**

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.