

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# L1KSL SLIM KOLIKA

## 120° CORNER CONNECTOR

### Black

### ORDERING INFORMATION

**Order Code:** 70241  
**Model Number:** L1KSL-120CON-BK  
**UPC:** 069549033085  
**Case Quantity:** 20

### PHYSICAL DATA


**Length in. (cm):** 9 1/8 (23.2)  
**Width in. (cm):** 6 1/4 (15.8)  
**Height in. (cm):** 3 (7.5)  
**Lens Material:** Frosted PS lens  
**Housing Material:** Extruded aluminum

### PERFORMANCE DATA

**Color Temperature (K):** 3 000/3 500/4 000  
**Life L70 (h)<sup>1</sup>:** 138 000  
**Tested LM-80 (h)<sup>1</sup>:** 10 000  
**Dimming:** 0-10 V  
**Operating Temp. Range:** -20 °C to 45 °C / -4 °F to 113 °F

<sup>1</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

### DIMENSIONS

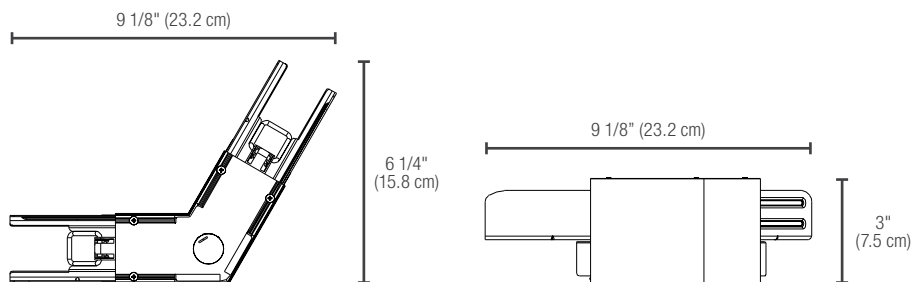

**5** yrs  
warranty

dry  
location

quick  
ship

dimmable  
fixture

Qty	Description	Price

I accept the specifications of the accessory configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
 All products are subject to change or may be discontinued any time without notice.