

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

L1KSL

SLIM KOLIKA

3 CCT, 3 Power, Direct/Indirect Light Ratio Selectable

ORDERING INFORMATION

Order Code: 70588
Model Number: L1KSL-2LS1U-PS25-3C-WH
UPC: 069549035744
Case Quantity: 12
DLC Unique ID: S-J3HFLT

PHYSICAL DATA

Dimensions ft (in.): 2 (24)
Lens Material: Frosted PS lens
Housing Material: Extruded aluminum
Housing Finish: White
Mounting: Suspended
Suspension Type: Aircraft cable
Suspension Length: 10 ft adjustable
Light Ratio (%up-%down): 0-100/10-90/30-70

PERFORMANCE DATA

Watts (W): 15/20/25
Volts (V AC): 120-347
Color Temperature (K)¹: 3 000/3 500/4 000
Lumen Output (lm)²: 1 725/2 300/2 875
Efficacy (lm/W): 115
CRI: 90+
Life L70 (h)³: 138 000
Tested LM-80 (h)³: 10 000
Dimming: 0-10 V
Power Factor: >0.9
THD (%): <20
Frequency (Hz): 50/60
Operating Temp. Range: -20 °C to 45 °C / -4 °F to 113 °F

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from DLC reported data at 3 000 K. Please refer to the LUMEN SPECIFICATION TABLE for more details.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

ACCESSORIES (order separately)

Order code	Model number	Type/Shape	Finish	Compatible with	Master case qty
70231	L1KSL-BKT	Continuous bracket kit for row mounting	Aluminum	L1KSL	40
70232	L1KSL-L90CON-WH	L shape	White	L1KSL	20
70234	L1KSL-TCON-WH	T shape	White	L1KSL	20
70236	L1KSL-XCON-WH	X shape	White	L1KSL	20
70238	L1KSL-YCON-WH	Y shape	White	L1KSL	20
70240	L1KSL-120CON-WH	120°	White	L1KSL	20

* Straight connection kits (brackets) included with each corner connector. Corner connectors is only available in direct lighting.

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Not all products are qualified on the DLC QPL.
 To view our DLC qualified products, please
 consult the DLC Qualified Products List at
www.designlights.org/search.

LUMEN SPECIFICATION TABLE

Direct

Watts (W)	3 000 K	
	Total lumens (lm)	Efficacy (lm/W)
0 % Indirect / 100 % Direct		
15	1 896	126
20	2 514	126
25	3 116	125

DEFAULT PROGRAMMING


2FT - 25 W / 3000 K

0 % Indirect / 100 % Direct

Direct/Indirect

Watts (W)	3 000 K			
	Total lumens (lm)	Indirect lumens (lm)	Direct lumens (lm)	Efficacy (lm/W)
10 % Indirect / 90 % Direct				
15	1 895	268	1 627	126
20	2 539	362	2 177	127
25	3 130	425	2 705	125
30 % Indirect / 70 % Direct				
15	1 864	686	1 178	124
20	2 478	925	1 553	124
25	3 057	1 121	1 936	122

DIMENSIONS AND WEIGHT

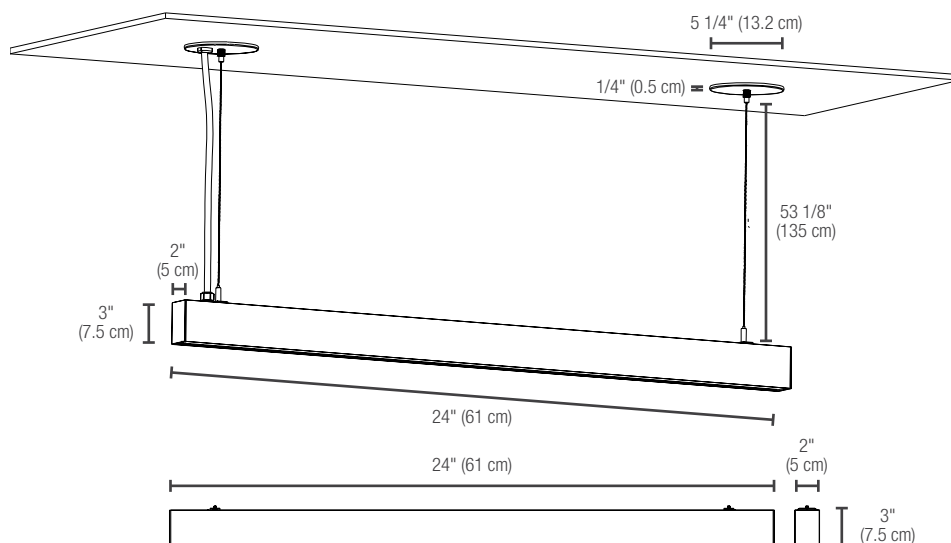

Net weight (lbs)	0.29
------------------	------

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.