

Individual Spec Sheet

L1KSL

SLIM KOLIKA

3 CCT, 3 Power, Direct/Indirect Light Ratio Selectable

ORDERING INFORMATION

Order Code: 70589
Model Number: L1KSL-2LS1U-PS25-3C-BK
UPC: 069549035751
Case Quantity: 12
DLC Unique ID: S-MFQCHZ

PHYSICAL DATA

Dimensions ft (in.): 2 (24)
Lens Material: Frosted PS lens
Housing Material: Extruded aluminum
Housing Finish: Black
Mounting: Suspended
Suspension Type: Aircraft cable
Suspension Length: 10 ft adjustable
Light Ratio (%up-%down): 0-100/10-90/30-70

PERFORMANCE DATA

Watts (W): 15/20/25
Volts (V AC): 120-347
Color Temperature (K)¹: 3 000/3 500/4 000
Lumen Output (lm)²: 1 725/2 300/2 875
Efficacy (lm/W): 115
CRI: 90+
Life L70 (h)³: 138 000
Tested LM-80 (h)³: 10 000
Dimming: 0-10 V
Power Factor: >0.9
THD (%): <20
Frequency (Hz): 50/60
Operating Temp. Range: -20 °C to 45 °C / -4 °F to 113 °F

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from DLC reported data at 3 000 K. Please refer to the LUMEN SPECIFICATION TABLE for more details.


³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

ACCESSORIES (order separately)

Order code	Model number	Type/Shape	Finish	Compatible with	Master case qty
70231	L1KSL-BKT	Continuous bracket kit for row mounting	Aluminum	L1KSL	40
70233	L1KSL-L90CON-BK	L shape	Black	L1KSL	20
70235	L1KSL-TCON-BK	T shape	Black	L1KSL	20
70237	L1KSL-XCON-BK	X shape	Black	L1KSL	20
70239	L1KSL-YCON-BK	Y shape	Black	L1KSL	20
70241	L1KSL-120CON-BK	120°	Black	L1KSL	20

* Straight connection kits (brackets) included with each corner connector. Corner connectors is only available in direct lighting.

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

LUMEN SPECIFICATION TABLE

Direct

Watts (W)	3 000 K	
	Total lumens (lm)	Efficacy (lm/W)
0 % Indirect / 100 % Direct		
15	1 606	107
20	2 128	106
25	2 572	103

DEFAULT PROGRAMMING


2FT - 25 W / 3000 K

0 % Indirect / 100 % Direct

Direct/Indirect

Watts (W)	3 000 K			
	Total lumens (lm)	Indirect lumens (lm)	Direct lumens (lm)	Efficacy (lm/W)
10 % Indirect / 90 % Direct				
15	1 623	248	1 375	108
20	2 160	335	1 825	108
25	2 658	409	2 249	106
30 % Indirect / 70 % Direct				
15	1 673	665	1 008	112
20	2 237	903	1 334	112
25	2 774	1 094	1 680	111

DIMENSIONS AND WEIGHT

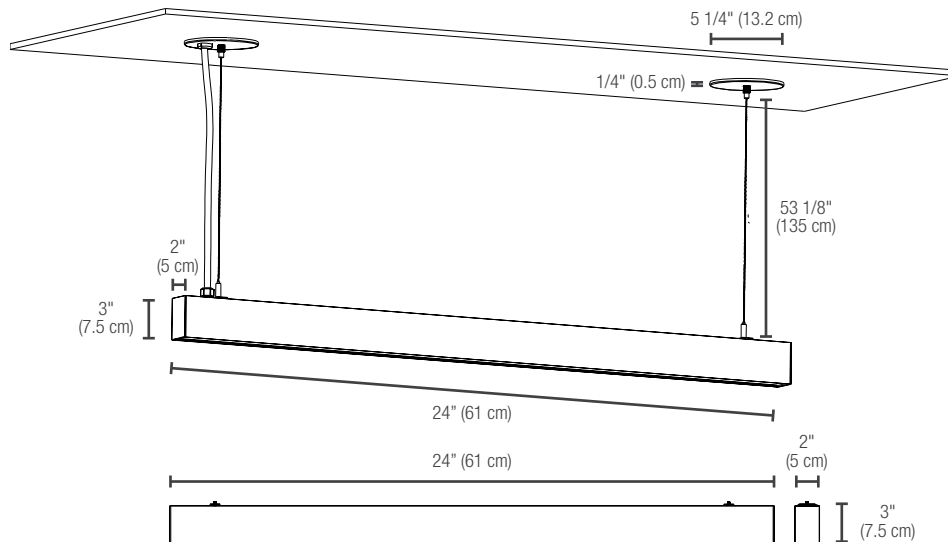

Net weight (lbs)	0.29
------------------	------

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.