

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_

Date: \_\_\_\_\_

## Individual Spec Sheet

# L1KSL

## SLIM KOLIKA

3 CCT, 3 Power, Direct/Indirect Light Ratio Selectable

### ORDERING INFORMATION

**Order Code:** 70592  
**Model Number:** L1KSL-8LS2U-PS80-3C-WH  
**UPC:** 069549035782  
**Case Quantity:** 6  
**DLC Unique ID:** S-4WX9T9

### PHYSICAL DATA

**Dimensions ft (in.):** 8 (96)  
**Lens Material:** Frosted PS lens  
**Housing Material:** Extruded aluminum  
**Housing Finish:** White  
**Mounting:** Suspended  
**Suspension Type:** Aircraft cable  
**Suspension Length:** 10 ft adjustable  
**Light Ratio (%up-%down):** 0-100/10-90/30-70

### PERFORMANCE DATA

**Watts (W):** 50/64/80  
**Volts (V AC):** 120-347  
**Color Temperature (K)<sup>1</sup>:** 3 000/3 500/4 000  
**Lumen Output (lm)<sup>2</sup>:** 4 600/5 750/7 360  
**Efficacy (lm/W):** 115  
**CRI:** 90+  
**Life L70 (h)<sup>3</sup>:** 138 000  
**Tested LM-80 (h)<sup>3</sup>:** 10 000  
**Dimming:** 0-10 V  
**Power Factor:** >0.9  
**THD (%):** <20  
**Frequency (Hz):** 50/60  
**Operating Temp. Range:** -20 °C to 45 °C / -4 °F to 113 °F

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from DLC reported data at 3 000 K. Please refer to the LUMEN SPECIFICATION TABLE for more details.

<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

### ACCESSORIES (order separately)

Order code	Model number	Type/Shape	Finish	Compatible with	Master case qty
70231	L1KSL-BKT	Continuous bracket kit for row mounting	Aluminum	L1KSL	40
70232	L1KSL-L90CON-WH	L shape	White	L1KSL	20
70234	L1KSL-TCON-WH	T shape	White	L1KSL	20
70236	L1KSL-XCON-WH	X shape	White	L1KSL	20
70238	L1KSL-YCON-WH	Y shape	White	L1KSL	20
70240	L1KSL-120CON-WH	120°	White	L1KSL	20

\* Straight connection kits (brackets) included with each corner connector. Corner connectors is only available in direct lighting.

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.





3  
CCT TCC

3 000/3 500/4 000 K



W  
power  
selectable



5  
yrs  
warranty



quick  
ship



LED  
fixture



dimmable



dry  
location



ICES  
005



direct  
light



direct / indirect  
light



FCC



UL  
CERTIFIED



DLC  
LISTED

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).

**LUMEN SPECIFICATION TABLE**

**Direct**


Watts (W)	3 000 K	
	Total lumens (lm)	Efficacy (lm/W)
0 % Indirect / 100 % Direct		
50	5 565	111
64	6 754	106
80	8 686	109

**DEFAULT PROGRAMMING**  
8FT - 80 W / 3000 K  
0 % Indirect / 100 % Direct

**Direct/Indirect**

Watts (W)	3 000 K			
	Total lumens (lm)	Indirect lumens (lm)	Direct lumens (lm)	Efficacy (lm/W)
10 % Indirect / 90 % Direct				
50	5 851	824	5 027	117
64	7 004	1 074	5 930	109
80	9 336	1 445	7 891	117
30 % Indirect / 70 % Direct				
50	5 926	1 911	4 015	119
64	7 605	2 295	5 310	119
80	9 918	3 070	6 848	124

**DIMENSIONS AND WEIGHT**

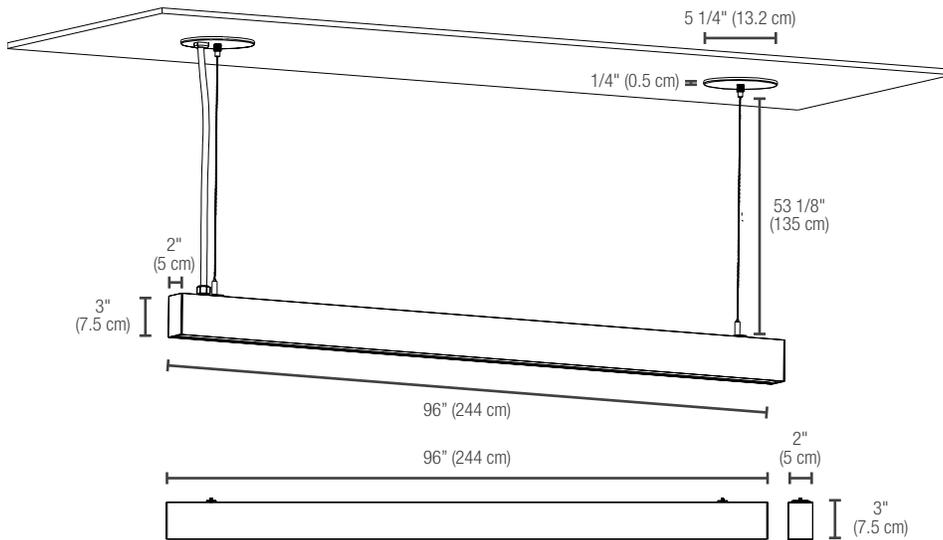

Net weight (lbs)	1.09
------------------	------

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.