

Project:		Type:
Drawn by:	Catalogue #:	Date:

Individual Spec Sheet

CIELO

3" TRIMLESS LED DOWNLIGHT

5 CCT Selectable Gimbal

ORDERING INFORMATION

Order Code: 70476

Model Number: DLCL3R-12A-5CBK UPC: 069549035089

Case Quantity:

PHYSICAL DATA

Size in (cm): 3 5/8 x 5 1/8 x 5 1/8 (9.1 x 12.9 x 12.9)

Shape: Round Finish: Black Lens Type: Clear PC Mounting: Recessed

PERFORMANCE DATA

Watts (W): 12 Volts (V AC): 120

Color Temperature (K)1: 2 700/3 000/3 500/4 000/5 000

1 000 Lumen Output (Im)2: Efficacy (Im/W): 83 CRI: 90+ Life L70 (h)3: 50 000 Beam Angle (°): 38 **Environment:** Wet location <20 THD (%): **Power Factor:** >0.9 **Cable Rating:** FT6 Frequency (Hz):

Operating Temp. Range: -30 °C to 45 °C (-22 °F to 113 °F)

Dimmable: Phase cut (ELV / Triac)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

LUMEN SPECIFICATION TABLE

Watts	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K	
(W)	Lumen output (Im)	Efficacy (Im/W)								
12	1 128	94	1 170	97	1 217	101	1 234	103	1 200	100

DEFAULT PROGRAMMING

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice





























IC

rated
















DIMENSIONS AND WEIGHT

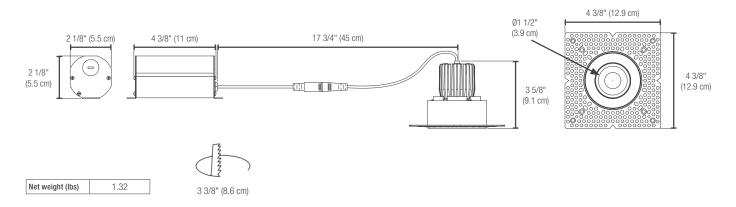

Qty	Description	Price	
Name:	rations of the luminaire configuration mentioned above.		
Company: Signature:		Date:	

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

