

Individual Spec Sheet

CIELO

3" TRIMLESS LED DOWNLIGHT

5 CCT Selectable Zoomable

ORDERING INFORMATION

Order Code: 70478
Model Number: DLCL3R-15A-5CBK
UPC: 069549035102
Case Quantity: 24

PHYSICAL DATA

Size in (cm): 4 5/8 x 5 1/8 x 5 1/8 (11.6 x 12.9 x 12.9)
Shape: Round
Finish: Black
Lens Type: Clear PC
Mounting: Recessed

PERFORMANCE DATA

Watts (W): 15
Volts (V AC): 120
Color Temperature (K)¹: 2 700/3 000/3 500/4 000/5 000
Lumen Output (lm)²: 1 230
Efficacy (lm/W): 82
CRI: 90+
Life L70 (h)³: 50 000
Beam Angle (°): 24 - 55
Environment: Wet location
THD (%): <20
Power Factor: >0.9
Cable Rating: FT6
Frequency (Hz): 60
Operating Temp. Range: -30 °C to 45 °C (-22 °F to 113 °F)
Dimmable: Phase cut (ELV / Triac)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

LUMEN SPECIFICATION TABLE


Watts (W)	Beam angle (°)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K	
		Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
15	24	936	62	968	65	1 009	67	1 018	68	972	65
	36	1 096	73	1 045	70	1 094	73	1 112	74	1 077	72
	55	1 079	72	1 136	76	1 181	79	1 191	79	1 145	76

DEFAULT PROGRAMMING

2 700 K



DIMENSIONS AND WEIGHT

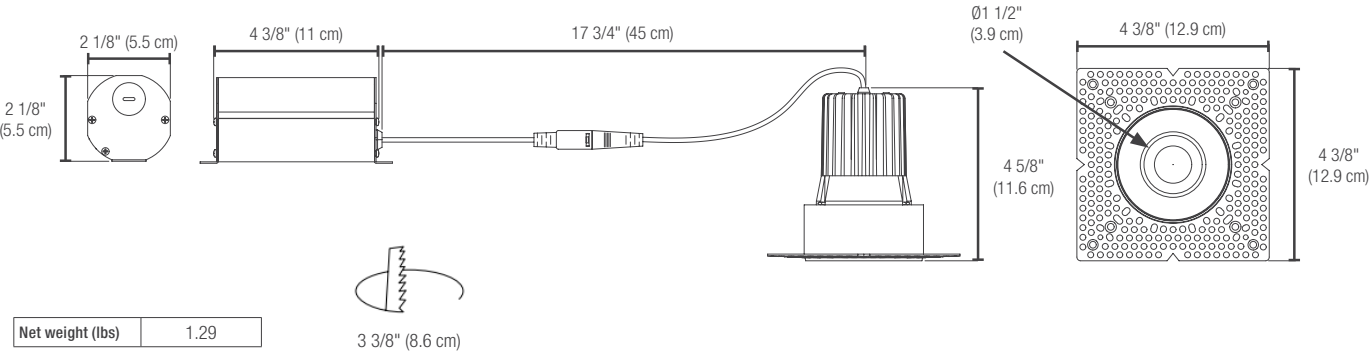

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.