

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_

Date: \_\_\_\_\_

*Individual Spec Sheet***SWIVEL CHOICE GEN. 2****4" LED DOWNLIGHT****5 CCT Selectable****ORDERING INFORMATION**

**Order Code:** 70533  
**Model Number:** SWDL4R-G2-9A-5CBK/CHOICE  
**UPC:** 069549035461  
**Case Quantity:** 32

**PHYSICAL DATA**

**Size in (cm):** 4 3/4 (12)  
**Shape:** Round  
**Finish:** Black  
**Lens Type:** Frosted Polycarbonate  
**Mounting:** Recessed

**PERFORMANCE DATA**

**Watts (W):** 9  
**Volts (V AC):** 120  
**Color Temperature (K)<sup>1</sup>:** 2 700/3 000/3 500/4 000/5 000  
**Lumen Output (lm)<sup>2</sup>:** 750  
**Efficacy (lm/W):** 83  
**CRI:** 90+  
**Life L70 (h)<sup>3</sup>:** 50 000  
**Beam Angle (°):** 45  
**Environment:** Wet location  
**THD (%):** <20  
**Power Factor:** >0.9  
**Cable Rating:** FT4  
**Frequency (Hz):** 60  
**Operating Temp. Range:** -30 °C to 40 °C (-22 °F to 104 °F)  
**Dimmable:** Phase cut (ELV / Triac)

<sup>1</sup> Typical colour temperature range: +/- 5 %.<sup>2</sup> Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.**LUMEN SPECIFICATION TABLE**

Watts (W)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K	
	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
9	764	84	817	90	866	96	863	95	822	91

**DEFAULT PROGRAMMING**

2 700 K

LED  
fixturedimmable  
fixture

airtight

wet  
locationIC  
ratedICES  
005

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

## ACCESSORIES (order separately)


Order code	Model number	Type
62771 <sup>1</sup>	ACC/MPLATE/3.75IN/HANG.BARS/STD	Mounting plate with hanger bars
66050 <sup>1</sup>	ACC/MPLATE/3.75IN/SQR/STD	Square mounting plate
66057 <sup>1</sup>	ACC/MPLATE/3.75IN/ADJ/STD	Adjustable mounting plate
68986 <sup>2</sup>	GOOF RING-4.25IN	Goof ring
64264	LPDL/ACC/6FT/EXTCABLE/STD	6' Extension cord

<sup>1</sup> Includes brackets and screws.

<sup>2</sup> Please note that the white finish of the goof rings differs from the white finish of the Swivel Choice Series.

## DIMENSIONS AND WEIGHTS

4"

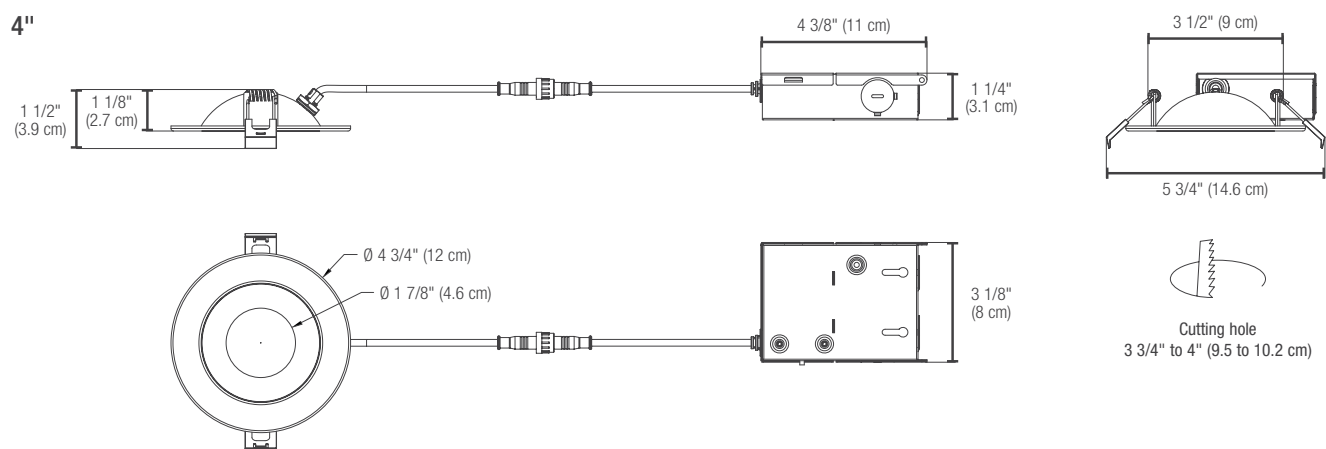

Net weight (lbs)	0.94
------------------	------

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name:

Company:

Signature:

Date:

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.