

Project: _____

Type: _____

Drawn by: _____ Catalogue #: _____

Date: _____

*Individual Spec Sheet***SWIVEL CHOICE GEN. 2****6" LED DOWNLIGHT****5 CCT Selectable****ORDERING INFORMATION**

Order Code: 70534
Model Number: SWDL6R-G2-13A-5CWH/CHOICE
UPC: 069549035478
Case Quantity: 12

PHYSICAL DATA

Size in (cm): 6 1/8 (15.6)
Shape: Round
Finish: White
Lens Type: Frosted Polycarbonate
Mounting: Recessed

PERFORMANCE DATA

Watts (W): 13
Volts (V AC): 120
Color Temperature (K)¹: 2 700/3 000/3 500/4 000/5 000
Lumen Output (lm)²: 1 100
Efficacy (lm/W): 84
CRI: 90+
Life L70 (h)³: 50 000
Beam Angle (°): 45
Environment: Wet location
THD (%): <20
Power Factor: >0.9
Cable Rating: FT4
Frequency (Hz): 60
Operating Temp. Range: -30 °C to 40 °C (-22 °F to 104 °F)
Dimmable: Phase cut (ELV / Triac)

¹ Typical colour temperature range: +/- 5 %.² Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.**LUMEN SPECIFICATION TABLE**

Watts (W)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K	
	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
13	1 174	90	1 172	90	1 298	99	1 295	99	1 226	94

DEFAULT PROGRAMMING

2 700 K




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ACCESSORIES (order separately)

Order code	Model number	Type
64264	LPDL/ACC/6FT/EXTCABLE/STD	6' Extension cord

DIMENSIONS AND WEIGHTS

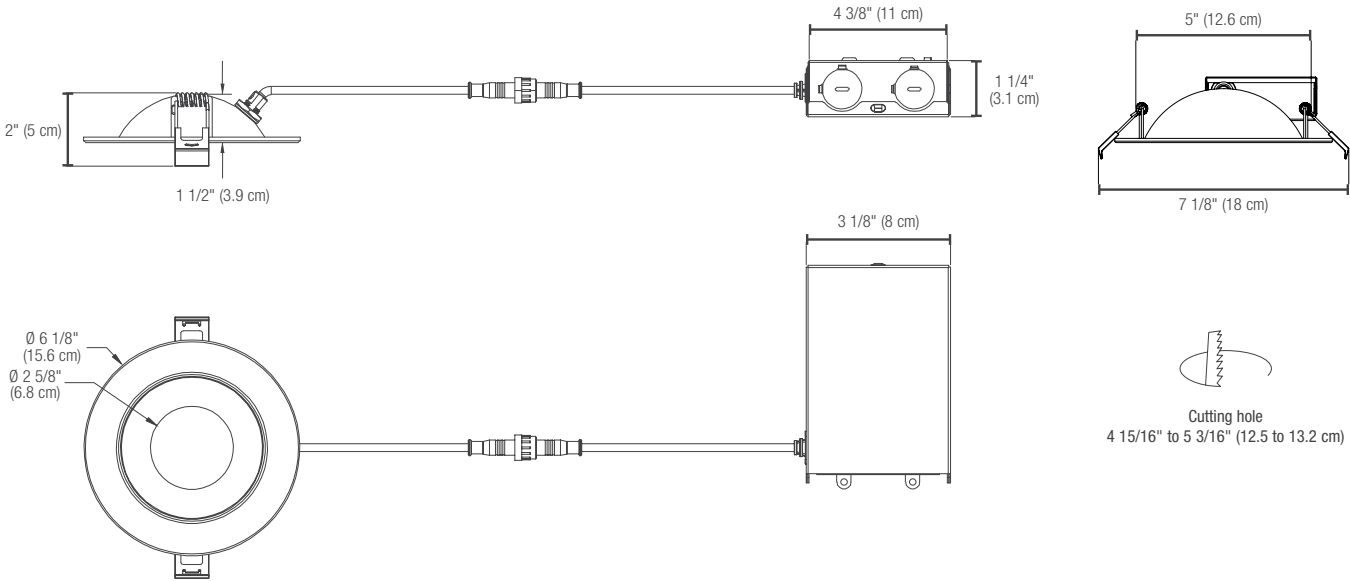

Net weight (lbs)	1.26
------------------	------

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.