




SIG3 High Lumen Floodlight:

**Perimeter Lighting, High Bay Applications,
and Outdoor Sports Facilities**

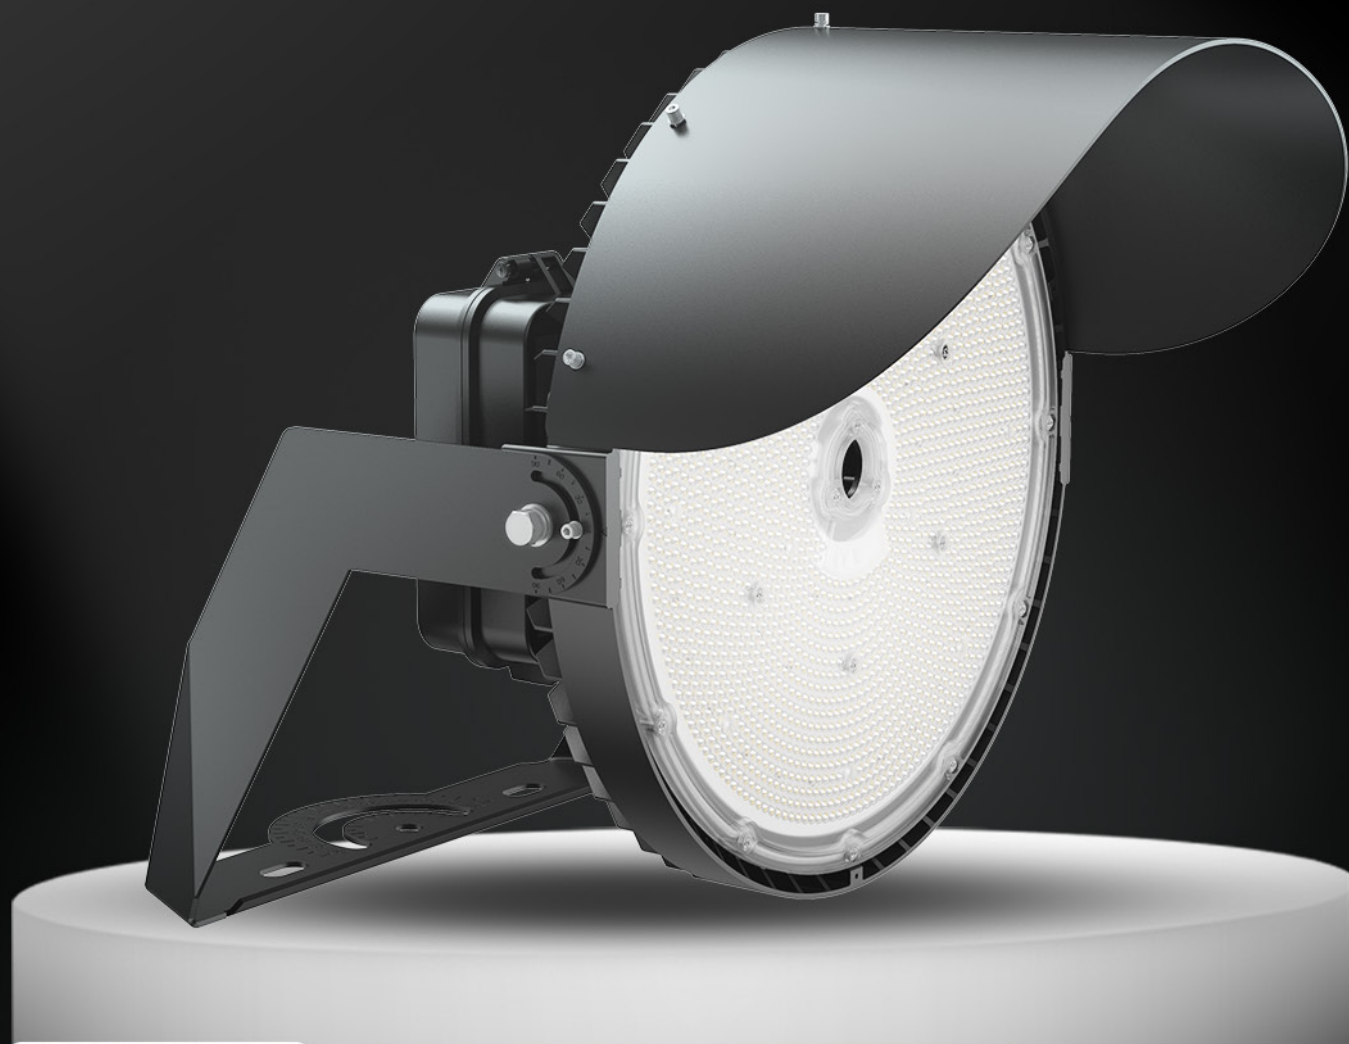

Remote Driver Placement option with 80' cord for easy installation and maintenance.

Drivers can be installed away from the fixture for easier access and maintenance.

- Industry leading efficacy: 180 lm/W.
- Power Set: 3 Power Settings for on field flexibility.
- Lumen Output: Up to 144,000 lumens.
- Full spectrum voltage: 120-277V, 277-480V.
- CCT: 4000K or 5000K.

Multiple mounting options for installation flexibility.



Yoke Mount



Slipfitter Mount




Eyebolt Mount




Surface Mount




3/4" Pendant Mount

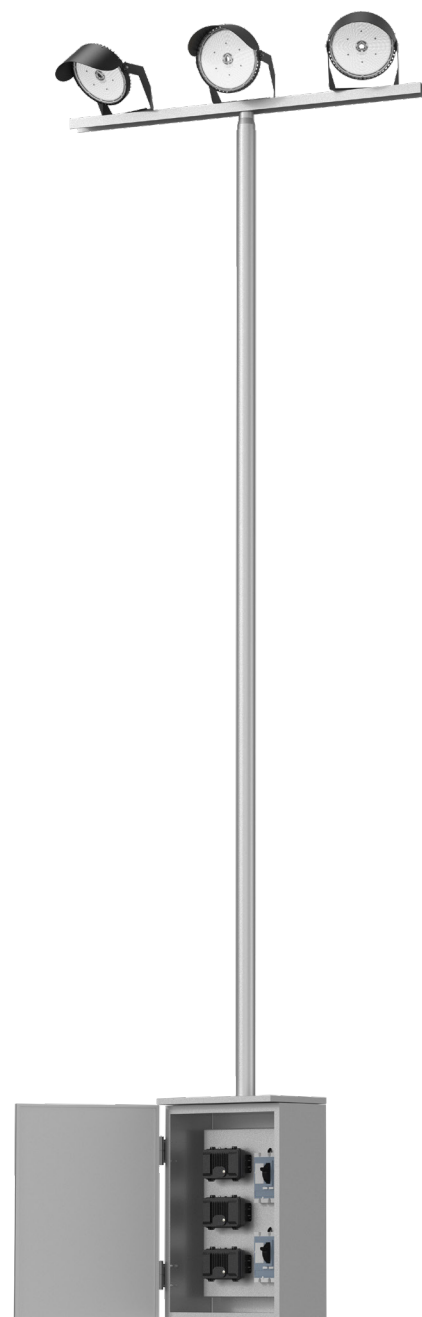

Adaptable for any project with 3 beam distributions: Narrow, Medium, Wide

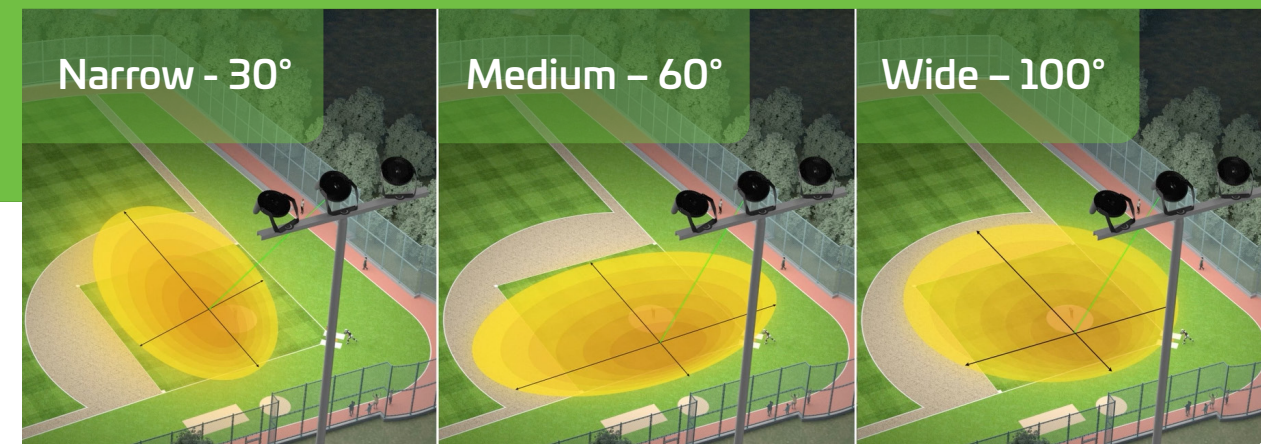

Built Powerful to withstand tough environments.

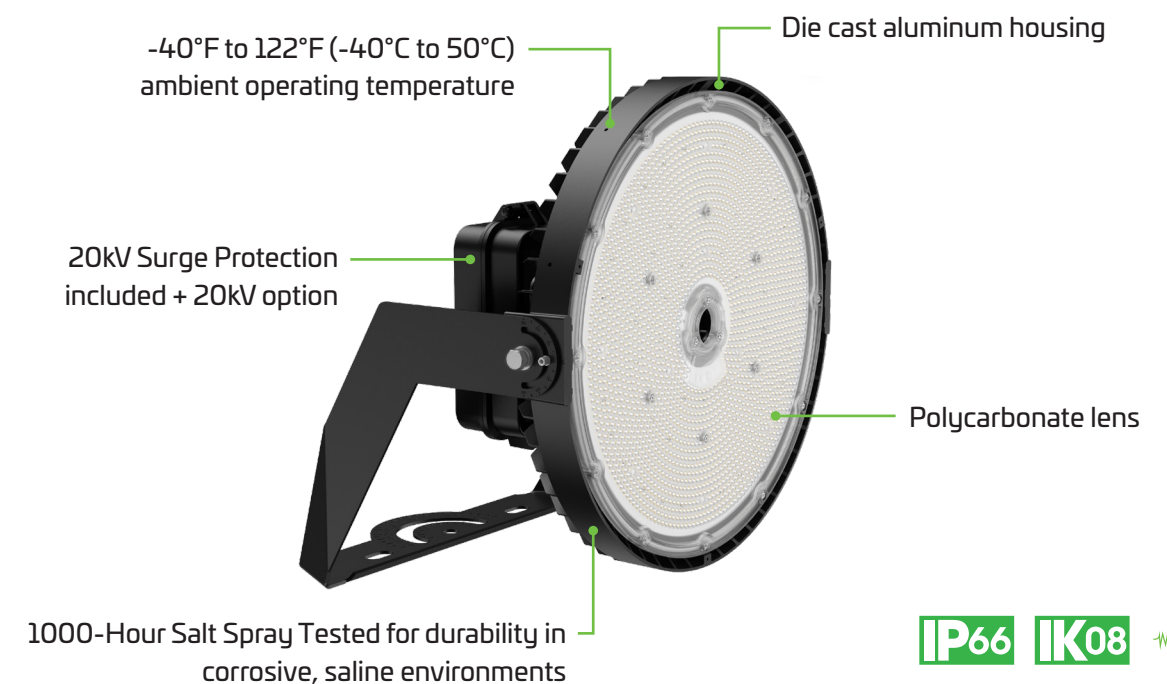

Customize your install with optional accessories



80' Cord for Remote Mounting



Visor



Laser Pointer



Medium (60°) / Wide (100°)
Optical Lenses

ORDER CODE	MODEL	WATTS (W)	COLOR TEMP. (CCT)	LUMEN OUTPUT (lm)	INPUT VOLTAGE (VAC)
120-277V					
15265	SIG3-PS600-30D-740-UDIM-BK	600/550/500W	4000K	108,000/99,000/90,000 lm	120-277V
15267	SIG3-PS600-30D-750-UDIM-BK	600/550/500W	5000K	108,000/99,000/90,000 lm	120-277V
15261	SIG3-PS800-30D-740-UDIM-BK	800/750/700W	4000K	144,000/135,000/126,000 lm	120-277V
15263	SIG3-PS800-30D-750-UDIM-BK	800/750/700W	5000K	144,000/135,000/126,000 lm	120-277V
277-480V					
15463	SIG3-PS600-30D-740-VDIM-BK	600/550/500W	4000K	108,000/99,000/90,000 lm	277-480V
15465	SIG3-PS600-30D-750-VDIM-BK	600/550/500W	5000K	108,000/99,000/90,000 lm	277-480V
15466	SIG3-PS800-30D-740-VDIM-BK	800/750/700W	4000K	144,000/135,000/126,000 lm	277-480V
15467	SIG3-PS800-30D-750-VDIM-BK	800/750/700W	5000K	144,000/135,000/126,000 lm	277-480V

Need a lighting layout?

Contact your Eiko Representative today!

