

KEYSTONE Wall Pack

40W / 60W / 80W | 3000K | 120-347V

Suitable for use in commercial and industrial building projects needing a sleek, customizable luminaire that enhances building aesthetics.

PRODUCT CODES: KWP-80W-3P-3CCT-UD-BK, KWP-80W-3P-3CCT-UD-BZ, KWP-80W-3P-3CCT-UD-WH



Power Selectable

40W / 60W / 80W

120-347V Universal Driver

0-10V dimming

Available in Black (BK),
Bronze (BZ), and White (WH)

Built-in Photocell

unplug to bypass

Type II Optics Standard

Type III and Type IV
Interchangeable Optics
sold separately

Motion Sensor Compatible

sold separately

DarkSky Approved

when set to 3000K operation



TECHNICAL DATA



**DARKSKY
APPROVED**
Reduces light pollution
Certified by DarkSky.org



LIGHT SPECIFICATIONS

Efficacy	171 lm/W
CCT	3000K
CRI	>80
Distribution	Type II
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	80W 4000K

LUMEN OUTPUT	
	3000K
40W	7650 lm
60W	10817 lm
80W	13654 lm


APPROVALS & LISTINGS

cUL	E482965
-----	---------

DIMENSIONS AND WEIGHTS

Fixture Weight	5.28 lbs
Fixture Dimensions	13.28 x 9.36 x 8.11 in
Carton Qty	1
Carton Weight	7.92 lbs
Carton Dimensions	14.7 x 10.3 x 9.1 in

DIMENSIONAL DRAWINGS (IN)

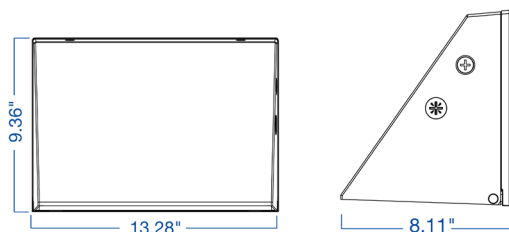

ELECTRICAL

Wattage	40W/60W/80W
Voltage	120-347V
Current	0.8A
Surge Protection	6kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C
Operating Temp (with Sensor)	-25 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Powder Coated
Finish Colour	Black / Bronze / White
IP Rating	IP65

ACCESSORIES* (Sold Separately)

Infrared Motion Sensor	MS01-PIR-TW-DC
Microwave Motion Sensor	MS04-MW-TW-DC
Type III Optics	KWP-TYPE-III-LG
Type IV Optics	KWP-TYPE-IV-LG
Type IV Amber Optics	KWP-TYPE-IV-LG-AM
Motion Sensor Remote	MS04-RC

NOTE: MS04-RC is required for Microwave and Infrared Motion Sensors to function

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833