

Technical Information Bulletin

DESIGN LED Lamps




Date: _____ Name of distributor: _____
In hands date of project: _____ Client #: _____
Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67610
Description: P30S/10W/40K/45/DESIGN/STD
UPC: 69549676107
Case quantity: 1/20

PHYSICAL DATA

Type: PAR30SN
Base: E26
Material: Glass
Lens type: Clear

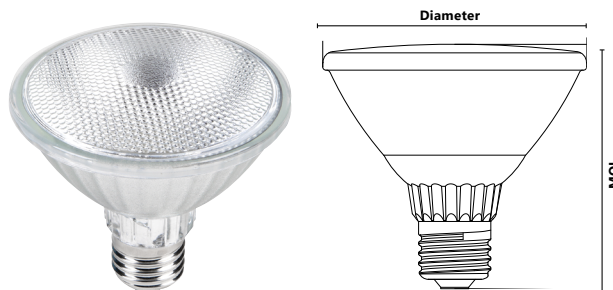

MOL: 3 11/32" (85 mm) Dia.: 3 3/4" (95 mm)

PERFORMANCE DATA

Watts (W): 10
Lamp volts (VAC): 120
Colour temperature (K)¹: 4 000
Life L70 (hrs): 25 000
Lumens (lm)²: 750
Lumens per watt (lm/W): 75
Traditional equivalent (W): 60
CRI: 80
Beam angle (°): 45
CBCP (cd): 810
THD (%): 60
Frequency (Hz): 60
Power factor: 0.86
Operating temperature range: -20°C to 45°C (-4°F to 113°F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

COMPATIBLE DIMMERS

Legrand	RH703PTUTC
Cooper	SLC03P,
Leviton	6615, IPL06, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1
Lutron	PD-5NE, RRD-6NA, DVRP-253P, SELV-300P, MACL-153P



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

December 12, 2024