

Technical Information Bulletin


LED Linear Tubes



Date: _____ Name of distributor: _____
In hands date of project: _____ Client #: _____
Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 66986
Description: T8/S2/11.5W/835/48/U6/ND/STD
UPC: 69549669864
Case quantity: 12
DLC Unique ID: PL3Q9WGEUSPA

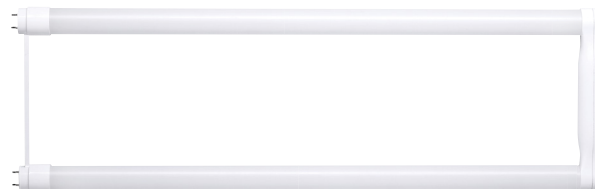

Nominal length : 22 7/16 in. (570 mm) Dia. : 1 in. (26 mm)

PHYSICAL DATA

Shape: T8 UBEND U6
Base: G13
Material: Glass

PERFORMANCE DATA

Bare Lamp Watts (W): 11.5
Volts (VAC): 120 -277/347
Colour temperature (K)¹: 3 500
Life L70 (hrs): 50 000
CRI: 82
Starting method: Instant & Program Start
Operating temperature range: -20°C to 45°F (4°C to 113°F)

Order code	Average System Watts (W)			Initial Lumens (lm) ²		
	LBF	NBF	HBFB ³	LBF	NBF	HBFB ³
66986	12.5	13.9	20.4	1 570	1 750	2 270

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ LBF= Low ballast factor, NBF= Normal ballast factor, HBFB= High ballast factor



Please refer to the ballast compatibility list to confirm lamp compatibility with the existing luminaire.

ADDITIONAL INFORMATION

THIS LAMP OPERATES ON INSTANT START AND MANY PROGRAM START ELECTRONIC BALLASTS.
Direct replacement for 32W/23T8/U6 watts lamps only.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.