

Technical Information Bulletin

Design LED Filament Lamps




Date: _____ Name of distributor: _____
In hands date of project: _____ Client #: _____
Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67322
Description: PS52/8W/27K/V/FIL/STD
UPC: 69549673229
Case quantity: 1 / 4

PHYSICAL DATA

Shape: PS52
Base: E26
Finish: Clear
Filament type: Vertical

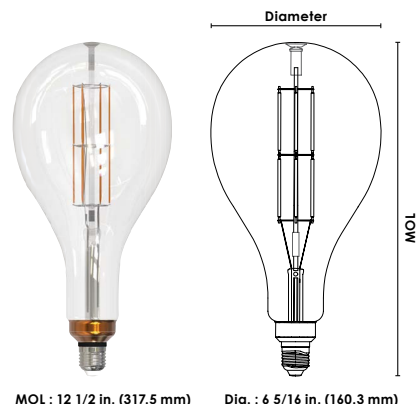

MOL : 12 1/2 in. (317.5 mm) Dia. : 6 5/16 in. (160.3 mm)

PERFORMANCE DATA

Watts (W): 8
Volts (VAC): 120
Colour temp. (K)¹: 2 700
Lumen output (lm): 900
Lumen per Watts (lm/W): 112.5
Traditional equivalent (W): 60
CRI: 80
Life L70 (h): 15 000
Beam angle (°): 360
Power factor: 0.9
Frequency (Hz): 60
Dimming: Forward and reverse
Burning position: Universal
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %

COMPATIBLE DIMMERS

Legrand	RH703PTUTC
Cooper	AAL06, RRD-6NA, SLC03P
Leviton	6615, 6674, DDMX1, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06
Lutron	AYCL-253P, CTCL-153P, DVCL-253P, DVRP-253P, MACL-153P, PD-5NE, PD-6WCL, SELV-300P



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

December 11, 2018