

Project:		Type:
Drawn by:	Catalogue #:	Date:

# Individual Spec Sheet

# **LOW VOLTAGE LED TAPE**

1.5 W, 24 V - IP22

## **ORDERING INFORMATION**

Order code: 65882

**Description:** TAPE/16.4'/1.5W/40K/24V/IP22/60/8MM/STD

UPC: 069549658820

Case quantity:



Reel Total Length: 16.4 ft. (5 m) Jacketed or Unjacketed: Unjacketed Wire gauge: 22 AWG

Number of LEDs: 60 LEDs per meter

18 LEDs per foot

**Cuttable length:**  $3^{15}/_{16}$  in. (100 mm) or every 6 LED chips

33 ft. (10 m) Maximum run length:

**Operating Temperature:** -25°C / -13°F to 40°C / 104°F

#### PERFORMANCE DATA

Volts (V DC): 24

Color temperature (K): 4 000 (Cool white) Watts per length: 24 W per reel 4.8 W per meter

0.12 W per inch 1 780 lm per reel

Light output per length: 356 lm per meter

9 lm per inch

Efficacy (Im/W): 74 CRI: 90 +Life (hrs): 50 000 Beam angle (°): 120

Typical Color temperature range: +/- 5 %
 Lumen values are derived from photometric testing. Initial lumens range: +/- 5 %
 Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

Extrusions, drivers and accessories are available (sold seperatly). Custom lenghts available upon request. Ask your sales representative for more information. This LED Tape is also available in 2.9 W and 4.4 W and in 12 V.

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications Data is based upon tests performed in a controlled environment. Inctual performance can vary depending on operating conditions. Specifications are subject to change without notice.




















### **DIMENSIONS**

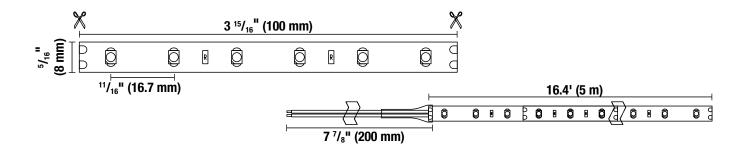

Qty		Description	Price		
I accept the specifications of the luminaire configuration mentioned above.  Name:					
Company: Signature:			Date:		

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

