

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED TAPE

LOW VOLTAGE TAPE

24 V

ORDERING INFORMATION

Order code: 65884
Description: TAPE/16.4'/2.9W/27K/24V/IP22/120/8MM/STD
UPC: 069549658844
Case quantity: 25

PHYSICAL DATA

Reel Total Length: 16.4 ft. (5 m)
Jacketed or Unjacketed: Unjacketed
Wire gauge: 22 AWG
Number of LEDs: 120 LEDs per meter
 37 LEDs per foot
Cuttable length: 2 in. (50 mm) or every 6 LED chips
Maximum run length: 33 ft. (10 m)
Operating Temperature: -25°C / -13°F to 40°C / 104°F

PERFORMANCE DATA

Volts (V): 24
Color temperature (K): 2 700 (Warm white)
Watts per length: 48 W per reel
 9.6 W per meter
 0.24 W per inch
Light output per length: 3 125 lm per reel
 625 lm per meter
 16 lm per inch
Efficacy (lm/W): 65
CRI: 90+
Life (hrs): 50 000
Beam angle (°): 120

¹ Typical Color temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 5 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

Extrusions, drivers and accessories are available (sold separately).
 Custom lengths available upon request. Ask your sales representative for more information.



3_{yrs}
 warranty



dimmable




dry
 location



This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS

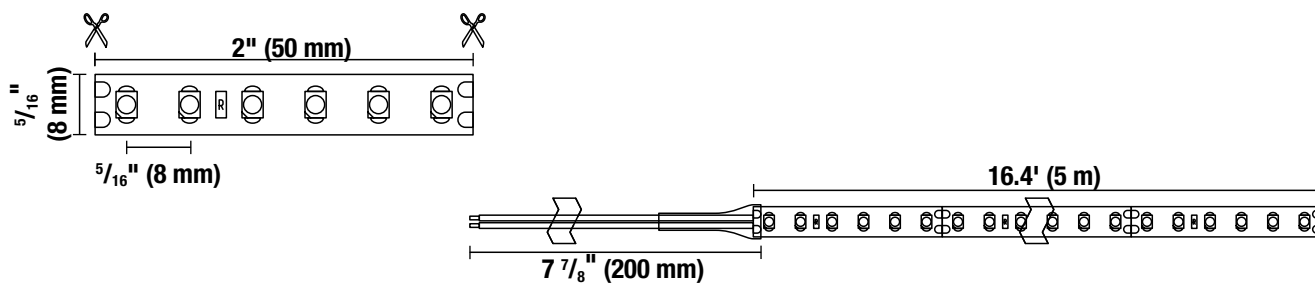

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.