

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LED TAPE

## LOW VOLTAGE TAPE

### 24 V

### ORDERING INFORMATION

Order code: 65885  
 Description: TAPE/16.4/2.9W/30K/24V/IP22/120/8MM/STD  
 UPC: 069549658851  
 Case quantity: 25

### PHYSICAL DATA

Reel Total Length: 16.4 ft. (5 m)  
 Jacketed or Unjacketed: Unjacketed  
 Wire gauge: 22 AWG  
 Number of LEDs: 120 LEDs per meter  
 37 LEDs per foot  
 Cuttable length: 2 in. (50 mm) or every 6 LED chips  
 Maximum run length: 33 ft. (10 m)  
 Operating Temperature: -25°C / -13°F to 40°C / 104°F

### PERFORMANCE DATA

Volts (V): 24  
 Color temperature (K): 3 000 (Neutral white)  
 Watts per length: 48 W per reel  
 9.6 W per meter  
 0.24 W per inch  
 Light output per length: 3 175 lm per reel  
 635 lm per meter  
 16 lm per inch  
 Efficacy (lm/W): 66  
 CRI: 90+  
 Life (hrs): 50 000  
 Beam angle (°): 120

<sup>1</sup> Typical Color temperature range: +/- 5 %  
<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 5 %  
<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

Extrusions, drivers and accessories are available (sold separately).  
 Custom lengths available upon request. Ask your sales representative for more information.  
 This LED Tape is also available in 1.5 W and 4.4 W and in IP67.



**3**  
 yrs  
 warranty



dimmmable




dry  
 location



This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

## DIMENSIONS

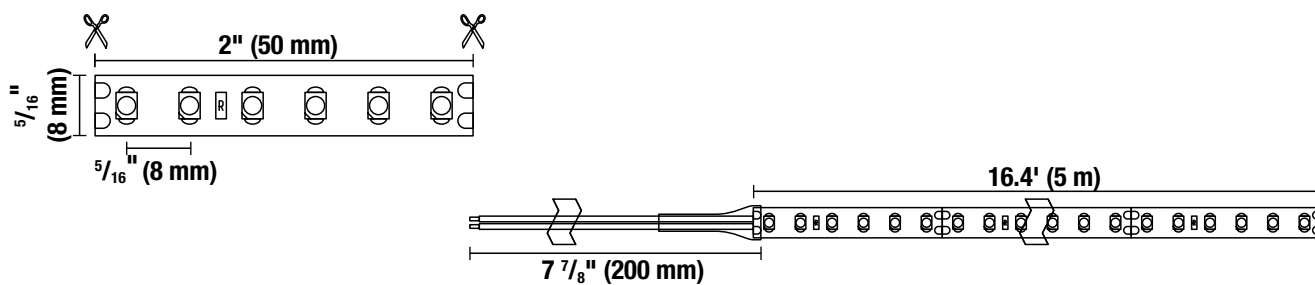

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.