

Project:		Type:
Drawn by:	Catalogue #:	Date:

Individual Spec Sheet

LOW VOLTAGE LED TAPE

WET LOCATION

2.9 W, 24 V - IP67

ORDERING INFORMATION

Order code: 65893

Description: TAPE/16.4'/2.9W/30K/24V/IP67/120/8MM/STD

UPC: 069549658936

Case quantity:

PHYSICAL DATA

Reel Total Length: 16.4 ft. (5 m) Jacketed or Unjacketed: Jacketed Wire gauge: 22 AWG

Number of LEDs: 120 LEDs per meter

37 LEDs per foot

Cuttable length: 2 in. (50 mm) or every 6 LED chips

Maximum run length: 33 ft. (10 m)

-25°C / -13°F to 40°C / 104°F Operating Temperature:

PERFORMANCE DATA

Volts (V DC):

Color temperature (K): 3 000 (Neutral white) Watts per length: 48 W per reel 9.6 W per meter

0.24 W per inch 3 045 lm per reel

609 lm per meter 15 lm per inch

Efficacy (Im/W): 63 CRI: 90 +Life (hrs): 50 000 Beam angle (°): 120

Light output per length:

INCLUDED IN THE BOX:

	5 Endcaps with hole
	5 Endcaps without hole
32 Mounting clips	
	1 Silicone tube

Drivers, connectors & accessories sold separately. This LED Tape is also available in IP22.

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice










٥^٥ wet location



¹ Typical Color temperature range: +/- 5 %
² Lumen values are derived from photometric testing. Initial lumens range: +/- 5 %
³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations



DIMENSIONS

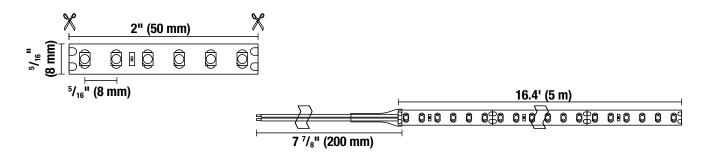

Qty	Description	Price			
I accept the specifications of the luminaire configuration mentioned above.					
Company:					
Name: Company: Signature:		Date:			

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

