

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LOW VOLTAGE LED TAPE

WET LOCATION

2.9 W, 24 V - IP67

ORDERING INFORMATION

Order code: 65894
Description: TAPE/16.4'/2.9W/40K/24V/IP67/120/8MM/STD
UPC: 069549658943
Case quantity: 25

PHYSICAL DATA

Reel Total Length: 16.4 ft. (5 m)
Jacketed or Unjacketed: Jacketed
Wire gauge: 22 AWG
Number of LEDs: 120 LEDs per meter
 37 LEDs per foot
Cuttable length: 2 in. (50 mm) or every 6 LED chips
Maximum run length: 33 ft. (10 m)
Operating Temperature: -25°C / -13°F to 40°C / 104°F

PERFORMANCE DATA

Volts (V DC): 24
Color temperature (K): 4 000 (Cool white)
Watts per length: 48 W per reel
 9.6 W per meter
 0.24 W per inch
Light output per length: 3 485 lm per reel
 697 lm per meter
 18 lm per inch
Efficacy (lm/W): 73
CRI: 90+
Life (hrs): 50 000
Beam angle (°): 120

¹ Typical Color temperature range: +/- 5 %
² Lumen values are derived from photometric testing. Initial lumens range: +/- 5 %
³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

INCLUDED IN THE BOX:


5 Endcaps with hole
5 Endcaps without hole
32 Mounting clips
1 Silicone tube

Drivers, connectors & accessories sold separately.
 This LED Tape is also available in IP22.

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



DIMENSIONS

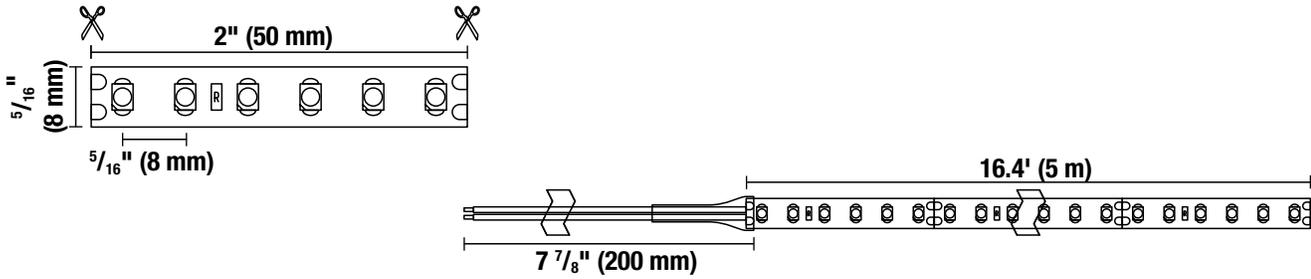

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.