

Project:	Type:	
,		31
Drawn by:	Catalogue #:	Date:

# Individual Spec Sheet

# **LED RGB**

# **WIRELESS REMOTE CONTROLLER**

Tape Accessories

#### **ORDERING INFORMATION**

Order code: 66840

**Model number:** TAPE/RGB/CONTROLLER-REMOTE/12V-24V/STD

**UPC:** 69549668409

Case quantity: 50

#### **PHYSICAL DATA**

**Product:** LED RGB Wireless Remote Controller

**Type:** Radio Frequency

Housing colour: White

#### **PERFORMANCE DATA**

**Output Power (W):** 60 W (12V) / 100 W (24V)

**Working Voltage (V):** DC 12V – DC 24V (depending on the LED Tape spec)

**Output Current (A):** 1.67A x 3

**Operating temp. range:**  $-30^{\circ}\text{C} \text{ to } 25^{\circ}\text{C} \text{ (-22°F to } 77^{\circ}\text{F)}$ 

## **COMPATIBLE PRODUCT**

Order code	Description	Type
66838	TAPE/32.8'/4.4W/RGB/24V/IP22/60/10MM/STD	RGB LED Tape
















Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.






### **TECHNICAL DRAWINGS AND DIMENSIONS**

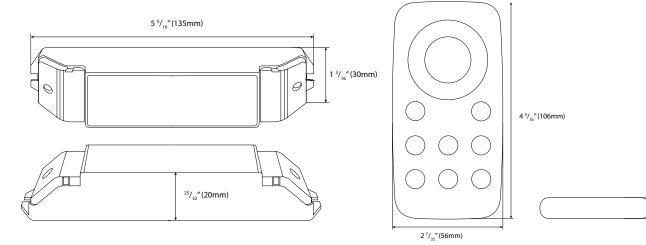


## **RGB LED CONTROLLER**

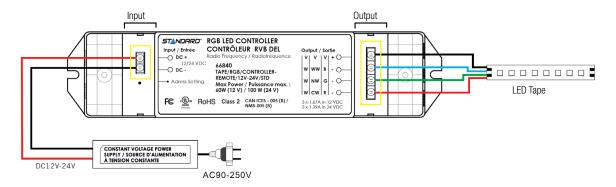


# **RGB REMOTE CONTROL FOR MODES**

Seq.	Modes	Description	
1	3 Colour Skipping	Red, green, and blue 3-colour skipping	
2	7 Colour Skipping	Red, green, blue, yellow, purple, cyan, white 7-colour skipping	
3	White Colour Strobe	White strobe	
4	3 Colour Smooth	Red, green and blue 3-colour gradual changes	
5	Full Colour Smooth	All 7-colour gradual changes	
6	RG Colour Smooth	Red, green 2-colour gradual changes	
7	RB Colour Smooth	Red, blue 2-colour gradual changes	
8	GB Colour Smooth	Green, blue 2-colour gradual changes	
9	White Fade & Change	White gradual bright & fade	
10	Great Cycle	Cycles through all modes	



Uty	Description	Price					
accept the specifications of the luminaire configuration mentioned above.							
Name:							
Company: Signature:							
Signature:		Date:					

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.



<sup>7</sup>/<sub>16</sub>"(11mm)