

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_

### ORDERING INFORMATION


Order code: 64657  
 Description: STPDN/NPLNT/130VA/347-240V/60Hz/AUTO/STD  
 UPC: 69549646575  
 Case quantity: 1



### FEATURES AND SPECIFICATIONS

Style: Nipple-Mount  
 Type: Auto Transformer  
 Input Volts (V): 347  
 Output Volts (V): 240  
 Max load (VA): 130  
 Frequency (Hz): 50/60  
 Dimmable\* (V): 0-10  
 Environment: Damp location  
 Weight (grams): 700  
 Length (cm): 6.5  
 Width (cm): 5.5  
 Height (cm): 7

### WIRING DIAGRAM

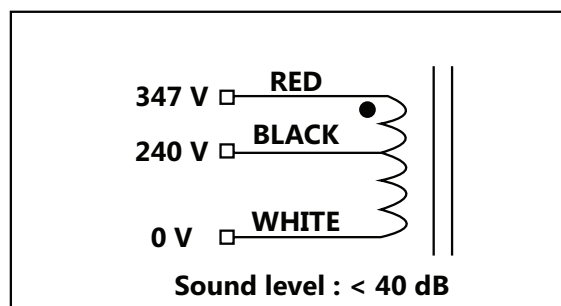

\* the dimming capacity is determined by the associated luminaire used with the transformer



CAN ICES-005 (A) / NMB-005 (A)

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

The attached data is provided to assist users in making lighting decisions based on various assumptions, factors and methods. Resources and efforts have been put in place to account for the data and the development of this tool however STANDARD does not warrant or guarantee that the results obtained will be accurate under actual use conditions. A lighting layout is recommend to ensure the proper light levels are attained to satisfy the demand of the application. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

**STANDARD**