

Technical Information Bulletin Fluorescent

E-Lume™

ORDERING INFORMATION

Order code: 56511
Description: F6T5/DL/PH/G5/ELUME
UPC: 69549565111
Case quantity: 48




Nominal length : 9 in. (229 mm) Dia. : 1/8 in. (16 mm)


PERFORMANCE DATA

Shape: T5
Base: G5 (Min Bipin)
Starting method: Preheat Start (PH)
Wattage (W): 6
Colour temperature (K): 6 500
CRI: 62
Rated life on IS¹ ballast:
 Based on a 3 hour start 6 000
 Based on a 12 hour start 7 500
Initial lumens (lm): 210
Mean lumens (lm): 197
Nominal efficiency (lm/W): 35
TCLP compliant: N/A
Phosphor composition: Triphosphor
Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): 10

DIMENSIONS

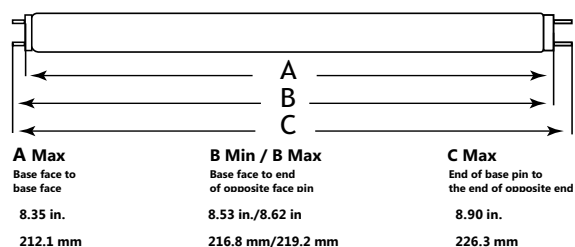

SPECTRAL DISTRIBUTION

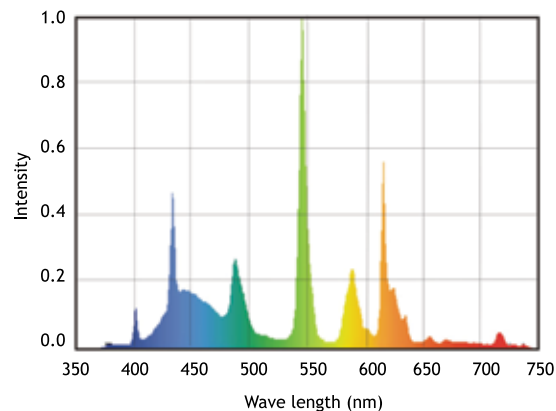

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 E-Lume ballast.



Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

November 11, 2014

STANDARD™