


ORDERING INFORMATION

Order code: 62992
Description: E232T8PS347/N/AS/BULK
UPC: 69549629929

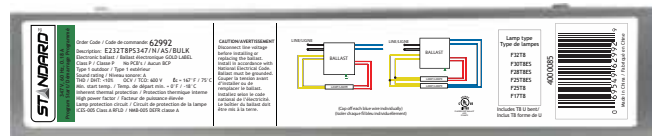

SPECIFICATIONS

Ballast type: Electronic
Starting method: Program Start
Lamp connection: Parallel
Input voltage (V): 347
Input frequency (Hz): 60
Max. case temperature: 90 °C
Thermal protection: Class P

Type: 1 Outdoor
Contains PCBs: No
Sound rating: A
Open current voltage (OCV) (V): 600
Inherent thermal protection: Yes
Lamp protection circuit: Yes
RFLD: ICES-005 Class A





347 VOLTS

Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD %	Power factor	Max. lamp current crest factor	B.E.F.
F32T8	2	32	0/-18	0.16	55	0.87	10	0.99	1.7	1.58
F32T8	1	32	0/-18	0.10	33	1.08	10	0.98	1.7	3.27
F32T8/ES (30 W)	2	30	32/0	0.15	53	0.87	10	0.99	1.7	1.64
F32T8/ES (30 W)	1	30	32/0	0.10	33	1.08	15	0.98	1.7	3.27
F32T8/ES (28 W)	2	28	32/0	0.14	48	0.87	10	0.99	1.7	1.81
F32T8/ES (28 W)	1	28	32/0	0.09	31	1.08	15	0.98	1.7	3.48
F32T8/ES (25 W)	2	25	32/0	0.13	44	0.87	15	0.99	1.7	1.98
F32T8/ES (25 W)	1	25	32/0	0.08	27	1.08	15	0.98	1.7	4.00
F25T8	2	25	0/-18	0.13	44	0.95	10	0.99	1.7	2.16
F25T8	1	25	0/-18	0.08	28	1.13	15	0.98	1.7	4.04
F17T8	2	17	0/-18	0.10	33	1.03	15	0.98	1.7	3.12
F17T8	1	17	0/-18	0.05	18	1.45	20	0.97	1.7	8.06
F40T8	1	40	0/-18	0.12	40	1.00	15	0.98	1.7	2.50

ORDERING INFORMATION

Order code: 62992
 Description: E232T8PS347/N/AS/BULK
 UPC: 69549629929

WIRING DIAGRAM

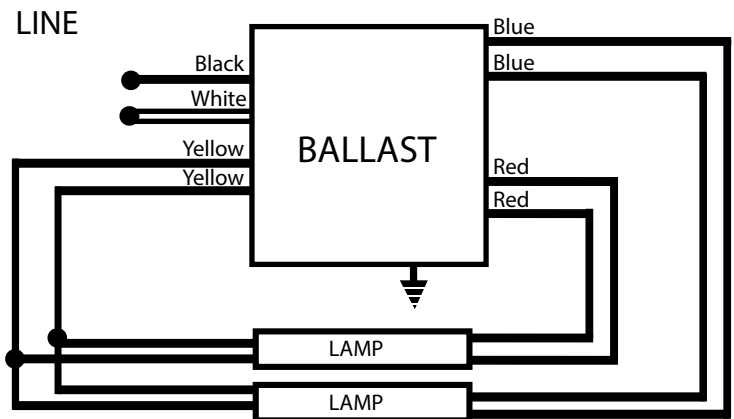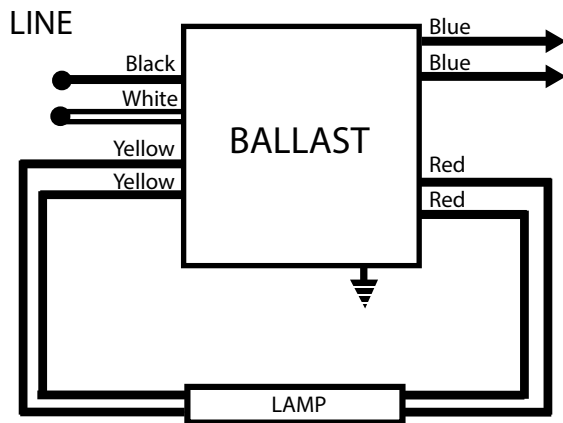

LEADS LENGTH

Black	18.8" (48 cm)
White	18.8" (48 cm)
Blue	30.9" (78.5 cm)
Red	30.9" (78.5 cm)
Yellow	46.4" (118 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.1 cm)
Width (W):	1.70" (4.3 cm)
Height (H):	1.14" (2.9 cm)
Mounting (M):	8.90" (22.6 cm)

