


ORDERING INFORMATION

Order code: 63028
Description: E454T5HOPS347/N/XTRM
UPC: 069549630284



SPECIFICATIONS

Ballast type: Electronic
Starting method: Program Start
Lamp connection: Series
Input voltage (V): 347V
Input frequency (Hz): 60Hz
Max. case temperature: 90 °C
Thermal protection: Class P

Type: 1 Outdoor
Contains PCBs: No
Sound rating: A
Open current voltage (OCV) (V): 600
Inherent thermal protection: Yes
Lamp protection circuit: Yes
ICES-005 Compliant: Class A RFLD
End of life (EoL) protection: Yes
Auto-restrike: Yes





Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
347 VOLTS										
F54T5HO (54W)	4	54	-22/-30	0.67	230	0.98	10	0.98	1.7	0.43
F54T5HO/ES (49W)	4	49	-22/-30	0.62	212	0.98	10	0.98	1.7	0.46
PL55/TTL (55W)	4	55	-22/-30	0.58	198	0.88	10	0.98	1.7	0.44
PL50/TTL (50W)	4	50	-22/-30	0.65	224	1.08	10	0.98	1.7	0.48
F39T5HO (39W)	4	39	-22/-30	0.49	170	1.00	10	0.98	1.7	0.59
F58T8 (58W)	4	58	-22/-30	0.76	227	1.02	10	0.98	1.7	0.43
F54T5HO (54W)	3	54	-22/-30	0.51	176	1.00	10	0.98	1.7	0.57
F54T5HO/ES (49W)	3	49	-22/-30	0.50	169	1.00	10	0.98	1.7	0.59
PL55/TTL (55W)	3	55	-22/-30	0.45	153	0.90	10	0.98	1.7	0.59
PL50/TTL (50W)	3	50	-22/-30	0.49	169	1.08	10	0.98	1.7	0.64
F58T8 (58W)	3	58	-22/-30	0.49	173	1.00	10	0.98	1.7	0.58
F54T5HO (54W)	2	54	-22/-30	0.34	118	0.99	15	0.97	1.7	0.84
F54T5HO/ES (49W)	2	49	-22/-30	0.33	113	0.99	15	0.97	1.7	0.88
PL55/TTL (55W)	2	55	-22/-30	0.29	102	0.92	15	0.97	1.7	0.90
PL50/TTL (50W)	2	50	-22/-30	0.30	103	1.10	15	0.97	1.7	1.07
F58T8 (58W)	2	58	-22/-30	0.32	111	0.99	15	0.97	1.7	0.89
F54T5HO (54W)	1	54	-22/-30	0.17	60	1.02	15	0.97	1.7	1.70
F54T5HO/ES (49W)	1	49	-22/-30	0.17	58	1.02	15	0.97	1.7	1.76
PL55/TTL (55W)	1	55	-22/-30	0.16	56	0.95	15	0.97	1.7	1.70
PL50/TTL (50W)	1	50	-22/-30	0.16	55	1.10	15	0.97	1.7	2.00
F58T8 (58W)	1	58	-22/-30	0.15	57	1.02	15	0.97	1.7	1.79


ORDERING INFORMATION

Order code: 63028
 Description: E454T5HOPS347/N/XTRM
 UPC: 069549630284

WIRING DIAGRAM

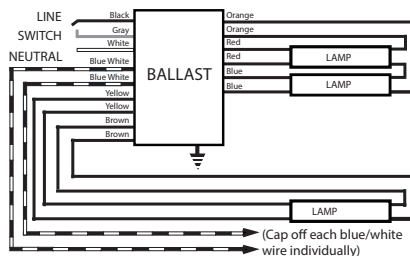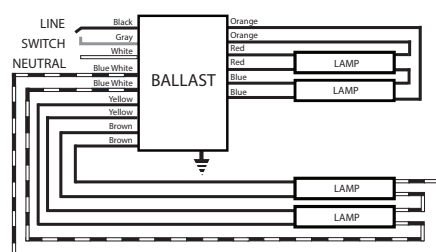

Switch	Number of lamps ON
Connected to the line	3 or 4 lamps
Not connected to the line	1 or 2 lamps

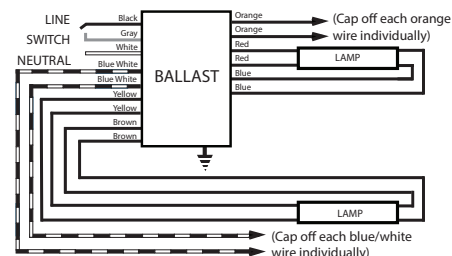

LEADS LENGTH

Black	18" (45.72 cm)
White	18" (45.72 cm)
Blue	30" (76.20 cm)
Red	30" (76.20 cm)
Yellow	30" (76.20 cm)
Grey	22" (55.88 cm)
Blue/White	48" (121.92 cm)
Brown	40" (101.6 cm)
Orange	56" (142.24 cm)

BALLAST DIMENSIONS

Length (L):	17.71" (45.0 cm)
Width (W):	1.70" (4.30 cm)
Height (H):	1.14" (2.90 cm)
Mounting (M):	17.24" (43.8 cm)

