

ORDERING INFORMATION

Order code: 61066
Description: E432T8PS347/L/AS/BULK
UPC: 69549610668



SPECIFICATIONS

Ballast type: Electronic
Starting method: Program Start
Lamp connection: Parallel
Input voltage (V): 347
Input frequency (Hz): 50/60
Max. case temperature: 75 °C
Thermal protection: Class P

Type: 1 Outdoor
Contains PCBs: No
Sound rating: A
Open current voltage (OCV) (V): 550
Inherent thermal protection: Yes
Lamp protection circuit: Yes
ICES-005 Compliant: Class A RFLD
Auto-restrike: Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
347 VOLTS										
F32T8 (32W)	4	32	0/-18	0.28	92	0.71	10	0.99	1.7	0.77
F32T8/ES (30W)	4	30	32/0	0.27	89	0.71	10	0.99	1.7	0.80
F32T8/ES (28W)	4	28	32/0	0.25	85	0.71	10	0.99	1.7	0.84
F32T8/ES (25W)	4	25	32/0	0.22	78	0.71	10	0.98	1.7	0.91
F25T8 (25W)	4	25	0/-18	0.21	74	0.72	15	0.98	1.7	0.97
F17T8 (17W)	4	17	0/-18	0.16	54	0.73	15	0.97	1.7	1.35
F32T8 (32W)	3	32	0/-18	0.23	78	0.76	10	0.99	1.7	0.97
F32T8/ES (30W)	3	30	32/0	0.22	75	0.76	15	0.98	1.7	1.01
F32T8/ES (28W)	3	28	32/0	0.22	71	0.76	15	0.98	1.7	1.07
F32T8/ES (25W)	3	25	32/0	0.18	65	0.76	15	0.98	1.7	1.17
F25T8 (25W)	3	25	0/-18	0.18	62	0.77	15	0.98	1.7	1.24
F17T8 (17W)	3	17	0/-18	0.13	45	0.78	20	0.97	1.7	1.73

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

WARRANTY:



Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
March 9, 2015

ORDERING INFORMATION

Order code: 61066
 Description: E432T8PS347/L/AS/BULK
 UPC: 69549610668

WIRING DIAGRAM

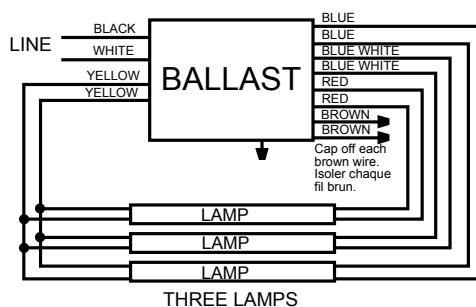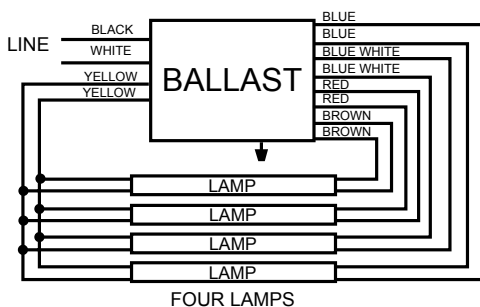


LEADS LENGTH

Black	18.8" (48.0 cm)
White	18.8" (48.0 cm)
Blue	30.9" (78.5 cm)
Red	30.9" (78.5 cm)
Yellow	46.4" (118.0 cm)
Blue/White	30.9" (78.5 cm)
Brown	30.9" (78.5 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.10 cm)
Width (W):	1.70" (4.30 cm)
Height (H):	1.14" (2.90 cm)
Mounting (M):	8.91" (22.63 cm)

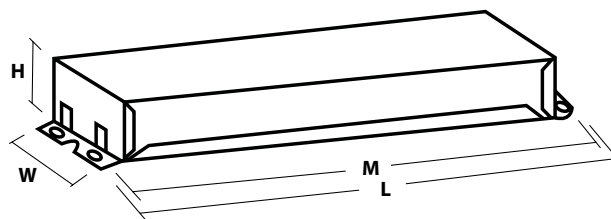

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015