


ORDERING INFORMATION

Order code: 61062
Description: E232T8PS120-277/L/AS/BULK
UPC: 69549610620



SPECIFICATIONS

Ballast type:	Electronic	Type	1 Outdoor
Starting method:	Program Start	Contains PCBs:	No
Lamp connection:	Series	Sound rating:	A
Input voltage (V):	120-277 V	Open current voltage (OCV) (V):	300
Input frequency (Hz):	50/60HZ	Inherent thermal protection:	Yes
Max. case temperature:	90 °C	Lamp protection circuit:	Yes
Thermal protection:	Class P	ICES-005 Compliant:	Class A RFLD
		Auto-restrike:	Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
120 VOLTS										
F32T8 (32W)	2	32	0/-18	0.43	52	0.78	10	0.98	1.7	1.50
F32T8/ES (30W)	2	30	0/-18	0.40	48	0.78	10	0.98	1.7	1.63
F32T8/ES (28W)	2	28	0/-18	0.39	46	0.78	10	0.98	1.7	1.70
F32T8/ES (25W)	2	25	0/-18	0.37	44	0.78	10	0.98	1.7	1.77
FB32T8 (32W)	2	32	0/-18	0.43	52	0.78	10	0.98	1.7	1.50
FB31T8 (31W)	2	31	0/-18	0.41	49	0.78	10	0.98	1.7	1.59
FB28T8 (28W)	2	28	0/-18	0.39	46	0.78	10	0.98	1.7	1.70
277 VOLTS										
F32T8 (32W)	2	32	0/-18	0.19	51	0.78	10	0.98	1.7	1.53
F32T8/ES (30W)	2	30	0/-18	0.18	47	0.78	10	0.98	1.7	1.66
F32T8/ES (28W)	2	28	0/-18	0.17	45	0.78	10	0.98	1.7	1.73
F32T8/ES (25W)	2	25	0/-18	0.16	43	0.78	10	0.98	1.7	1.81
FB32T8 (32W)	2	32	0/-18	0.19	51	0.78	10	0.98	1.7	1.53
FB31T8 (31W)	2	31	0/-18	0.18	48	0.78	10	0.98	1.7	1.63
FB28T8 (28W)	2	28	0/-18	0.17	45	0.78	10	0.98	1.7	1.73

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
March 9, 2015


ORDERING INFORMATION

Order code: 61062

Description: E232T8PS120-277/L

UPC: 69549610620

WIRING DIAGRAM

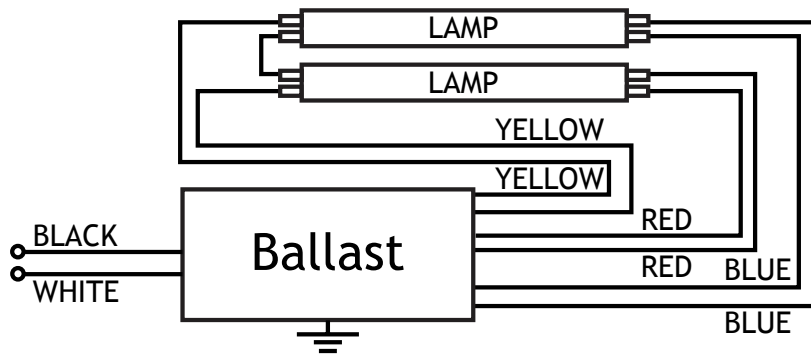


LEADS LENGTH

Black	25.00" (63.50 cm)
White	25.00" (63.50 cm)
Blue	31.00" (78.74 cm)
Red	31.00" (78.74 cm)
Yellow	46.00" (116.84 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.10 cm)
Width (W):	1.70" (4.30 cm)
Height (H):	1.14" (2.90 cm)
Mounting (M):	8.90" (22.60 cm)
Weight	1.1 lbs

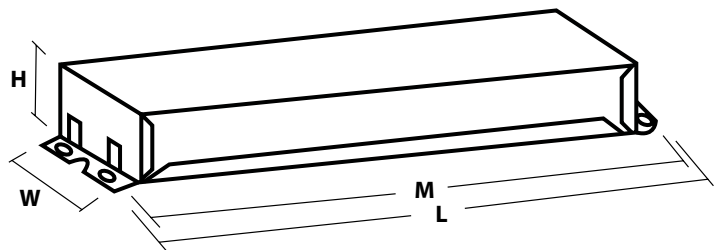

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March 9, 2015