


ORDERING INFORMATION

Order code: 61065
Description: E432T8PS120-277/L/AS/BULK
UPC: 69549610651

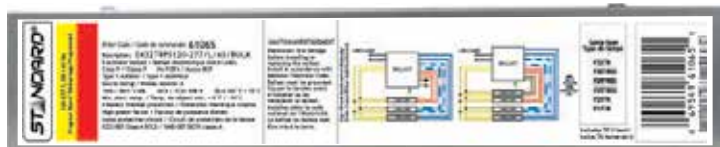

SPECIFICATIONS

Ballast type: Electronic
Starting method: Program Start
Lamp connection: Parallel
Input voltage (V): 120-277
Input frequency (Hz): 50/60
Max. case temperature: 75 °C
Thermal protection: Class P

Type: 1 Outdoor
Contains PCBs: No
Sound rating: A
Open current voltage (OCV) (V): 550
Inherent thermal protection: Yes
Lamp protection circuit: Yes
ICES-005 Compliant: Class A RFLD
Auto-restrike: Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
120 VOLTS										
F32T8 (32W)	4	32	0/-18	0.79	93	0.71	10	0.99	1.7	0.76
F32T8/ES (30W)	4	30	32/0	0.78	89	0.71	10	0.99	1.7	0.80
F32T8/ES (28W)	4	28	32/0	0.65	85	0.71	10	0.99	1.7	0.84
F32T8/ES (25W)	4	25	32/0	0.63	78	0.71	10	0.99	1.7	0.91
F25T8 (25W)	4	25	0/-18	0.60	74	0.72	10	0.99	1.7	0.97
F17T8 (17W)	4	17	0/-18	0.43	54	0.73	15	0.99	1.7	1.35
F32T8 (32W)	3	32	0/-18	0.64	78	0.76	10	0.99	1.7	0.97
F32T8/ES (30W)	3	30	32/0	0.63	75	0.75	10	0.99	1.7	1.00
F32T8/ES (28W)	3	28	32/0	0.62	71	0.75	10	0.99	1.7	1.06
F32T8/ES (25W)	3	25	32/0	0.52	65	0.75	10	0.99	1.7	1.15
F25T8 (25W)	3	25	0/-18	0.49	62	0.76	10	0.99	1.7	1.23
F17T8 (17W)	3	17	0/-18	0.36	45	0.77	15	0.99	1.7	1.71

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
March 9, 2015

ORDERING INFORMATION

Order code: 61065
 Description: E432T8PS120-277/L/AS/BULK
 UPC: 69549610651

Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
230 VOLTS										
F32T8 (32W)	4	32	0/-18	0.41	93	0.71	10	0.99	1.7	0.76
F32T8/ES (30W)	4	30	32/0	0.40	89	0.71	10	0.99	1.7	0.80
F32T8/ES (28W)	4	28	32/0	0.36	85	0.71	10	0.99	1.7	0.84
F32T8/ES (25W)	4	25	32/0	0.33	78	0.71	15	0.99	1.7	0.91
F25T8 (25W)	4	25	0/-18	0.33	74	0.72	15	0.99	1.7	0.97
F17T8 (17W)	4	17	0/-18	0.23	54	0.73	15	0.98	1.7	1.35
F32T8 (32W)	3	32	0/-18	0.34	78	0.76	15	0.99	1.7	0.97
F32T8/ES (30W)	3	30	32/0	0.33	75	0.75	10	0.99	1.7	1.00
F32T8/ES (28W)	3	28	32/0	0.33	71	0.75	10	0.99	1.7	1.06
F32T8/ES (25W)	3	25	32/0	0.31	65	0.75	15	0.98	1.7	1.15
F25T8 (25W)	3	25	0/-18	0.26	62	0.76	15	0.98	1.7	1.23
F17T8 (17W)	3	17	0/-18	0.19	45	0.77	20	0.97	1.7	1.71
277 VOLTS										
F32T8 (32W)	4	32	0/-18	0.34	92	0.71	10	0.99	1.7	0.77
F32T8/ES (30W)	4	30	32/0	0.33	89	0.71	10	0.99	1.7	0.80
F32T8/ES (28W)	4	28	32/0	0.30	85	0.71	10	0.99	1.7	0.84
F32T8/ES (25W)	4	25	32/0	0.28	78	0.71	15	0.98	1.7	0.91
F25T8 (25W)	4	25	0/-18	0.27	74	0.72	15	0.98	1.7	0.97
F17T8 (17W)	4	17	0/-18	0.19	54	0.73	25	0.95	1.7	1.35
F32T8 (32W)	3	32	0/-18	0.28	78	0.76	15	0.98	1.7	0.97
F32T8/ES (30W)	3	30	32/0	0.27	75	0.75	10	0.99	1.7	1.00
F32T8/ES (28W)	3	28	32/0	0.27	71	0.75	10	0.99	1.7	1.06
F32T8/ES (25W)	3	25	32/0	0.25	65	0.75	15	0.98	1.7	1.15
F25T8 (25W)	3	25	0/-18	0.22	62	0.76	25	0.95	1.7	1.23
F17T8 (17W)	3	17	0/-18	0.16	45	0.77	35	0.95	1.7	1.71

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

WARRANTY:


Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015

ORDERING INFORMATION

Order code: 61065
 Description: E432T8PS120-277/L/AS/BULK
 UPC: 69549610651

WIRING DIAGRAM

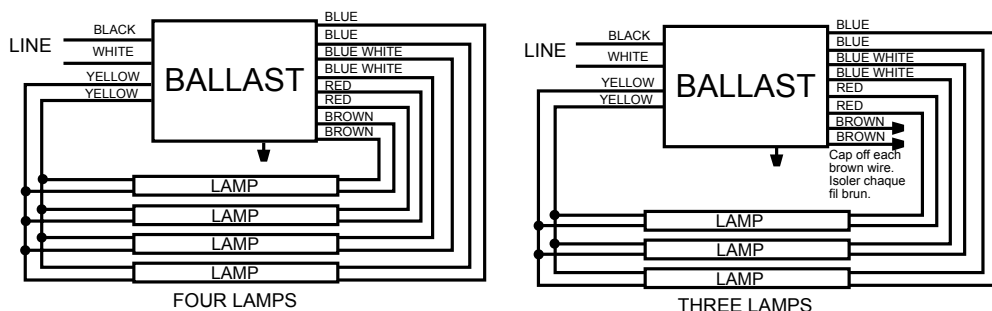


LEADS LENGTH

Black	18.8" (48.0 cm)
White	18.8" (48.0 cm)
Blue	30.9" (78.5 cm)
Red	30.9" (78.5 cm)
Yellow	46.4" (118.0 cm)
Blue/White	30.9" (78.5 cm)
Brown	30.9" (78.5 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.1 cm)
Width (W):	1.70" (4.30 cm)
Height (H):	1.14" (2.9 cm)
Mounting (M):	8.90" (22.6 cm)

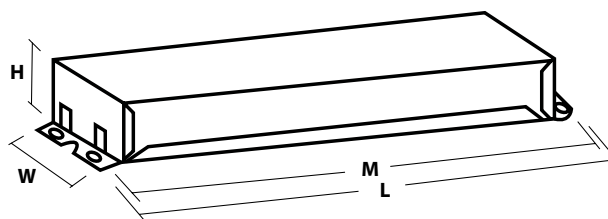

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015