


ORDERING INFORMATION

Order code: 10062
Description: BMH0250/347/480/600/C/CWI/H/K/
UPC: 69549100626

SPECIFICATIONS

Ballast type: Magnetic metal halide
Ballast style: Core and coil
Circuit type: CWI
ANSI code: M58
Input voltage (V): 347/480/600
Input frequency (Hz): 60
Line volt regulation: $\pm 10\%$
Line watt regulation: $\pm 10\%$
Insulation class: H (180°)

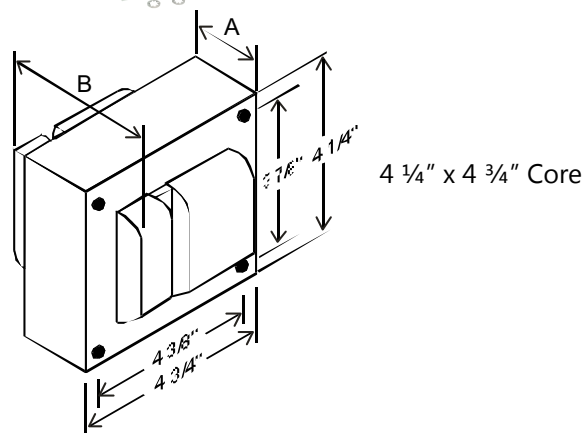

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
347	0.90	0.72	0.30	250	292	300	190	C	3	0.16 - 0.30	0.90	-20°F / -30°C
480	0.65	0.52	0.22	250	292	300	260	C	2	0.12 - 0.22	0.90	-20°F / -30°C
600	0.52	0.41	0.18	250	292	300	315	C	2	0.10 - 0.17	0.90	-20°F / -30°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	275 - 325
Short circuit:	2.30 - 2.60

BALLAST DIMENSIONS


Dimension A:	1.80"
Dimension B:	3.55"
Lead Lengths:	12.00"
Weight (lbs):	12.00

WIRING DIAGRAM

Ground ballast core

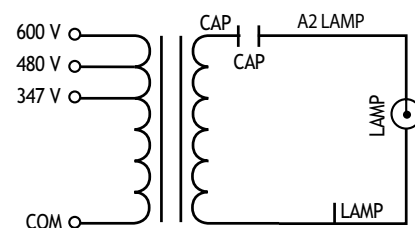

BRACKET

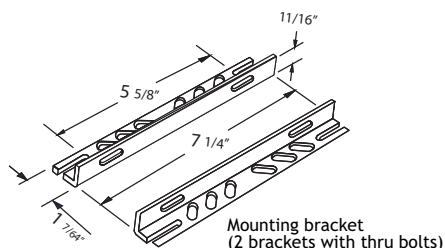

CAPACITOR

