

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LPDL™ CHOICE

LED LOW PROFILE DOWNLIGHT

ORDERING INFORMATION

Order code: 68304
Model number: LPDL4R-11A-30WH/CHOICE
UPC: 069549015838
Case quantity: 32

PHYSICAL DATA

Size in (mm): 4 3/4 (120)
Shape: Round
Finish: White
Lens type: Frosted polycarbonate
Mounting: Recessed
Cable Rating: FT4

PERFORMANCE DATA

Watts (W): 11
Volts (V AC): 120
Color temperature (K): 3 000
Lumen output (lm): 750
Lumen per Watts (lm/W): 68
CRI: 80+
Life L70 (h): 54 000
Beam angle (°): 100
Environment: Damp location
THD (%): <15%
Power factor: >0.9
Frequency (Hz): 60
Operating temp. range: -30 °C to 40 °C (-22 °F to 104 °F)
Dimmable: Yes

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

COMPATIBLE ACCESSORIES

Order code	Model number	Type
66051	ACC/MPLATE/4.25/SQR/STD	Square mounting plate
66058	ACC/MPLATE/4.25/ADJ/STD	Adjustable mounting plate
66821	ACC/MPLATE/4.25IN/HANG.BARS/STD	Mounting plate with hanger bars
66143	ACC/4/VAPOR BARRIER/STD	Vapor barrier extender
68986	GOOF RING-4.25IN	Goof rings
64264	LPDL/ACC/6FT/EXTCABLE/STD	6' extension cord



5 yrs
warranty

quick
ship

LED
fixture

dimmable

airtight

damp
location

IC
rated

ICES
005

ETL
Intertek

ENERGY STAR


This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE DIMMERS

Brand	Model
LEGRAND	RH703PTUTC
COOPER	AAL06, SLC03P
LUTRON	PD-5NE, RRD-6NA, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRL-253, SELV-300P, MACL-153P
LEVITON	066EV, IPL06, 6674, DSL06-1ZL, DSM10-1LZ, IPE04-1LZ, DDMX1


NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.

DIMENSIONS

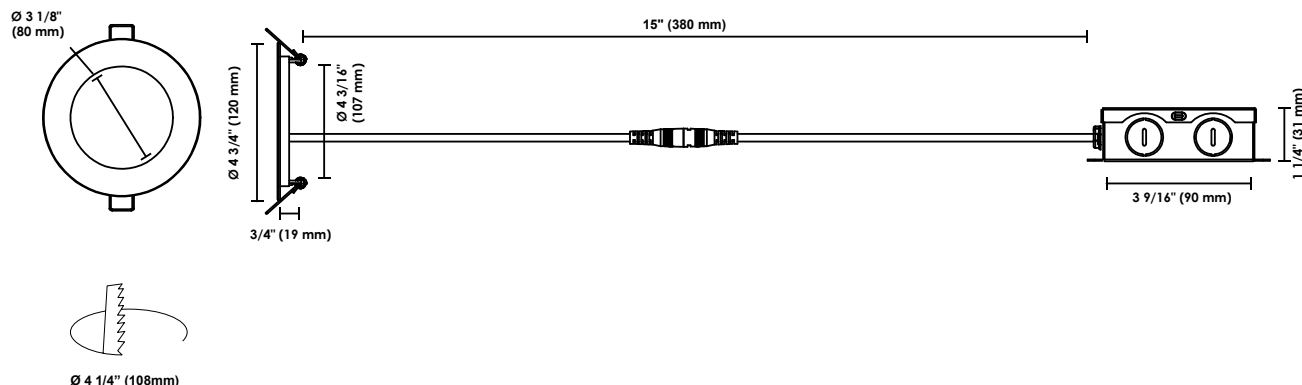PHOTOMETRIC DATA¹

68304 • LPDL4R-11A-30WH/CHOICE • 756.4 lm

Polar candela distribution

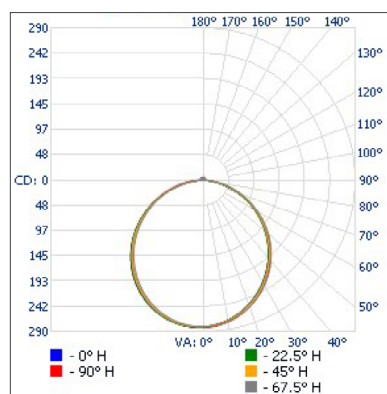

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	193.9	25.6%
0-40	325.0	43%
0-60	592.5	78.3%
60-90	163.9	21.7%
0-90	756.4	100%

Illuminance at a distance

Center beam fc		Beam width	
1.7'	83.0	5.9'	6.0'
3.3'	22.0	11.5'	11.6'
5.0'	9.59	17.4'	17.5'
6.7'	5.34	23.3'	23.5'
8.3'	3.48	28.9'	29.1'
10.0'	2.40	34.8'	35.0'

■ Vert. spread: 120.3°
■ Horiz. spread: 120.6°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.