

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

WPA-L

LED ALL PURPOSE WALL PACK

Selectable color temperature (3 000/4 000/5 000 K)
 Integrated photocell

ORDERING INFORMATION

Order code: 68722
Model number: WPA-LS1B-W-3C-BR-P
UPC: 69549018730
Case quantity: 6
DLC unique ID: PLLA75MM6AAEC

PHYSICAL DATA

Dimensions: 10.96" x 6.58" x 5.2" (278.5 mm x 174.2 mm x 132.1 mm)
Lens material: Frosted polycarbonate lens
Housing material: Die cast back plate with PC cover

PERFORMANCE DATA

Watts (W): 20
Volts (V): 120-277
Color temperature (K): 3 000/4 000/5 000
Lumen output (lm): 2 260 - 2 451
Efficiency (lm/W): 113 - 123
CRI: 70
Photocell (Yes/No): Yes
Dimming (Yes/No): Yes
Power factor: ≥0.9
THD (%): ≤20
Frequency (Hz): 50/60
Surge protection (kV): 2
Operating temp. range (°C): -40 to 40

¹ Typical color temperature range: +/- 5 %
² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %



LED
fixture



dimmable
fixture



wet
location



ICES
005




IK08



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.


DIMENSIONS

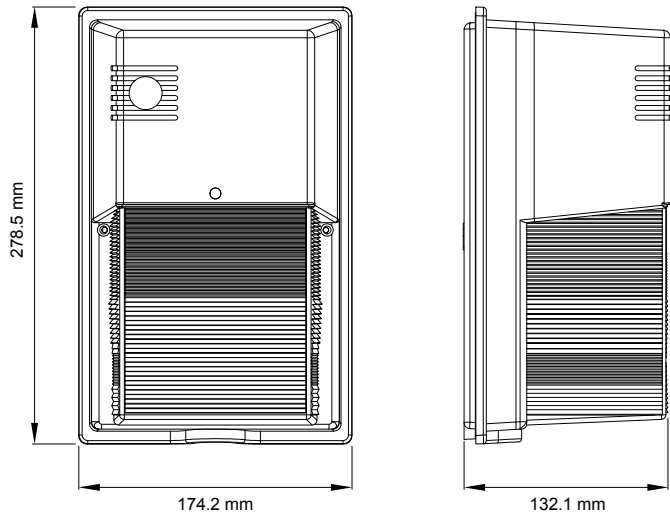

PHOTOMETRIC DATA¹

68722 • WPA-LS1B-W-3C-BR-P-40K • 2 260.0 lm

Polar candela distribution

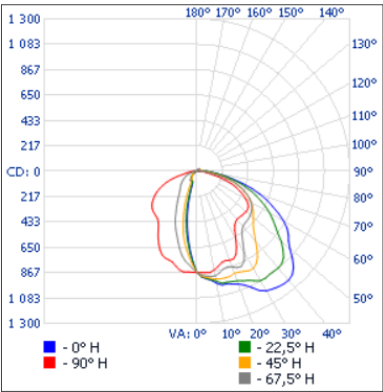

¹ Complete IES files available on our website.

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	557.1	24.7%
0-40	894.6	39.6%
0-60	1 614.7	71.4%
60-90	549.7	24.3%
70-100	283.2	12.5%
90-120	57.8	2.6%
0-90	2 164.4	95.8%
90-180	95.7	4.2%
0-180	2 260.0	100%

Illuminance at a distance

Center beam fc		Beam width	
17'	2.99 fc	26.3'	23.9'
34'	0.75 fc	52.7'	47.8'
51'	0.33 fc	79.0'	71.7'
68'	0.19 fc	105.4'	95.6'
85'	0.12 fc	131.7'	119.5'
102'	0.08 fc	158.0'	143.3'

Vert. spread: 75.5°

Horiz. spread: 70.2°

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.