

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

WTL LED ADJUSTABLE WALL PACK

Selectable color temperature (3 000/4 000/5 000 K)

Power selectable

Integrated photocell

Multi-Voltage (120-347 V)

ORDERING INFORMATION

Order code: 68768
Model number: WTL-PS30A-Q-3C-BR-P
UPC: 069549019096
Case quantity: 8
DLC Unique ID: P77YNXT4

PHYSICAL DATA

Dimensions: 7.31" x 6.49" x 4.54" (185.8 mm x 164.9 mm x 115.2 mm)
Lens material: Clear polycarbonate lens
Housing material: Die-Cast

PERFORMANCE DATA

Watts (W): 15/30
Volts (VAC): 120-347
Color temperature (K):¹ 3 000/4 000/5 000
Lumen output (lm):² 2 100 - 3 925
Efficiency (lm/W): 137 - 140
CRI: 70
Photocell (Yes/No): Yes
Dimming (Yes/No): Yes
Power factor: ≥0.9
THD (%): ≤20
Frequency (Hz): 50/60
Surge protection (kV): 6
Operating temp. range: -40 to 50 °C

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %



ICES
005




IK07



This lighting equipment complies with Canadian standard ICES-005 for use in commercial applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS

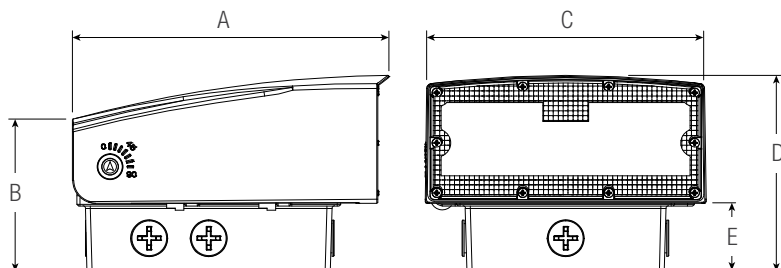


A in. (cm)	7.36 (18.7)
B in. (cm)	3.62 (9.2)
C in. (cm)	6.42 (16.3)
D in. (cm)	4.21 (10.7)
E in. (cm)	1.54 (3.9)

PHOTOMETRIC DATA¹

68768 • WTL-PS30A-Q-3C-P • 15 W • 4 000 K • 2 099 lm

Polar candela distribution

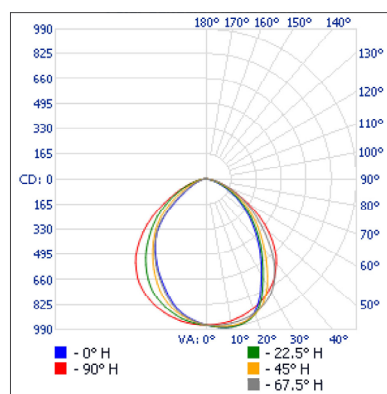

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	729.5	34.8%
0-40	1 152.1	54.9%
0-60	1 835.1	87.4%
60-90	258.1	12.3%
70-100	87.4	4.2%
90-120	1.2	0.1%
0-90	2 093.3	99.7%
90-180	5.7	0.3%
0-180	2 099.0	100%


Illuminance at a distance

Center beam fc		Beam width	
8.3'	13.9	14.9'	20'
16.7'	3.44	29.9'	40.3'
25'	1.54	44.8'	60.4'
33.3'	0.87	59.6'	80.4'
41.7'	0.55	74.7'	100.7'
50'	0.38	89.5'	120.8'

Vert. spread: 83.7°
Horiz. spread: 100.7°

68768 • WTL-PS30A-Q-3C-P • 30 W • 4 000 K • 3 923 lm

Polar candela distribution

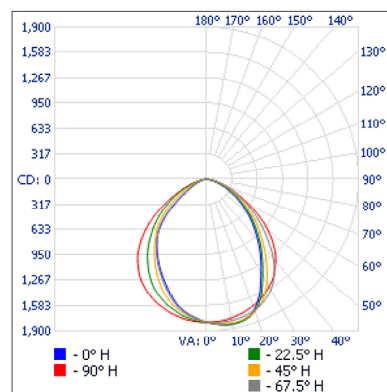

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	1 363.4	34.8%
0-40	2 153.3	54.9%
0-60	3 430.0	87.4%
60-90	482.4	12.3%
70-100	163.3	4.2%
90-120	2.3	0.1%
0-90	3 912.4	99.7%
90-180	10.7	0.3%
0-180	3 923.1	100%

Illuminance at a distance

Center beam fc		Beam width	
8.3'	26	14.9'	20'
16.7'	6.43	29.9'	40.3'
25'	2.87	44.8'	60.4'
33.3'	1.62	59.6'	80.4'
41.7'	1.03	74.7'	100.7'
50'	0.72	89.5'	120.8'

Vert. spread: 83.7°
Horiz. spread: 100.7°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.