

## Individual Spec Sheet

# CONTEMPORARY SQUARE LED WALL SCONCE LUMINAIRE 3 CCT SELECTABLE

### ORDERING INFORMATION

**Order code:** 69021  
**Model number:** SVANCO14-S15W-A-3CBK  
**UPC:** 069549023482  
**Case quantity:** 4

### PHYSICAL DATA

**Dimensions in (mm):** 14" (356)  
**Lens material:** PMMA lens with a frosted finish  
**Housing material:** Steel housing  
**Housing finish:** Black  
**Mounting:** Wall mounted, surface

### PERFORMANCE DATA

**Watts (W):** 15  
**Volts (VAC):** 120  
**Color temperature (K):** 3 000/3 500/4 000  
**Lumen output (lm):** 886  
**Efficacy (lm/W):** 59  
**CRI:** 90+  
**Life L70 (h):** 50 000  
**Dimming:** Yes  
**Power factor:** ≥0.90  
**Frequency (Hz):** 60  
**Operating temp. range:** -20 °C to 40 °C (-4 °F to 104 °F)


<sup>1</sup> Typical colour temperature range: +/- 5 %.  
<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.  
<sup>3</sup> Lumen values are based on 3 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.  
<sup>4</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

### LUMEN SPECIFICATION TABLE

Order code	Model number	Watts (W)	3 000 K		3 500 K		4 000 K	
			Lumen output (lm)	Efficacy (lm/w)	Lumen output (lm)	Efficacy (lm/w)	Lumen output (lm)	Efficacy (lm/w)
69021	SVANCO14-S15W-A-3CBK	15	886	59	948	63	918	61

#### DEFAULT PROGRAMMING

3 000 K




## COMPATIBLE DIMMERS<sup>1</sup>

BRAND	Model
LEGRAND	RH703PTUTC
COOPER	AAL06
LEVITON	IPL06, 6674, DSL06-1ZL, DSM10-1LZ, IPE04-1LZ, DDMX1
LUTRON	PD-5NE, PD-6WCL, RRD-6NA-WH, DVCL-153P, CTCL-153P, DVCL-253P, DVRP-253-WH, SELV-300P, MACL-153P

Dimming range: 10%-100%

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.


## DIMENSIONS AND WEIGHT

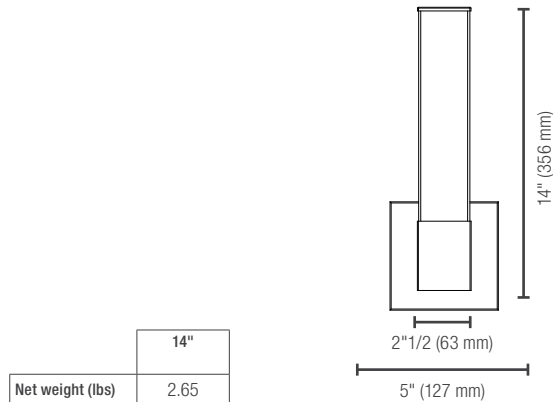

## PHOTOMETRIC DATA<sup>1</sup>

69021 • SVANC014-S15W-A-3CBK • 15 W • 3 000 K • 886.3 lm

### Polar candela distribution

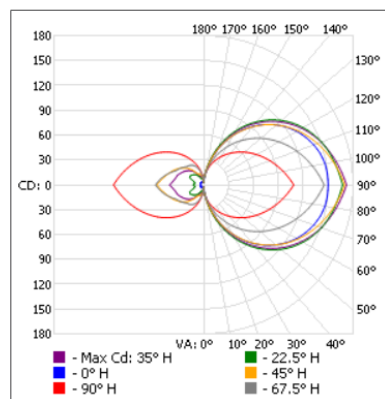

### Zonal lumen summary

Zone	Lumens	% Fixture
0-30	22.6	2.6
0-40	52.6	5.9
0-60	163.7	18.5
60-90	279.5	18.5
70-100	304.0	34.3
90-120	279.5	31.5
0-90	443.2	50
90-180	443.1	50
0-180	886.3	100

### Illuminance at a distance

Center beam fc	Beam width
1.7'	6.9'
3.3'	13.4'
5.0'	20.3'
6.7'	27.2'
8.3'	33.7'
10.0'	40.6'

■ Beam spread: 127.6°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.