

# TECHNICAL INFORMATION BULLETIN

## CERAMIC METAL HALIDE

### CERAPRO™

#### Ordering Information

Order code: 69171  
 Description: CMT35/U/830/G8.5/STD  
 UPC: 069549025097  
 Case quantity: 12 / 144




#### Performance Data

Initial lumens (lm): 3 400  
 Mean lumens (lm): 2 890  
 Initial lumens per watt: 97  
 Wattage (W): 35  
 Lamp voltage (V): 90  
 Colour temperature (K): 3 000  
 CRI: 85  
 Average life (hrs): 10 000  
 Warm up time to 90% (min): 5  
 Hot restart time to 90% (min): 3-5  
 Burn Position: Universal




#### Physical Data / Requirements


Shape: T4.5  
 Base: G8.5  
 Finish: Clear  
 Luminaire rating: Enclosed  
 ANSI code: C130  
 MOL (mm): 85  
 Diameter (mm): 14  
 LCL (mm): 54

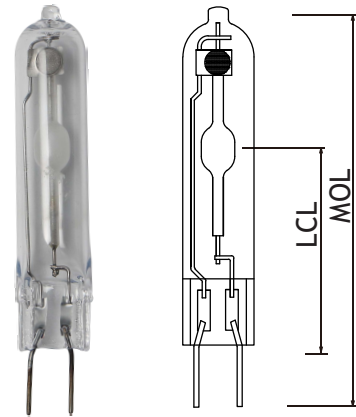

#### Spectral Distribution

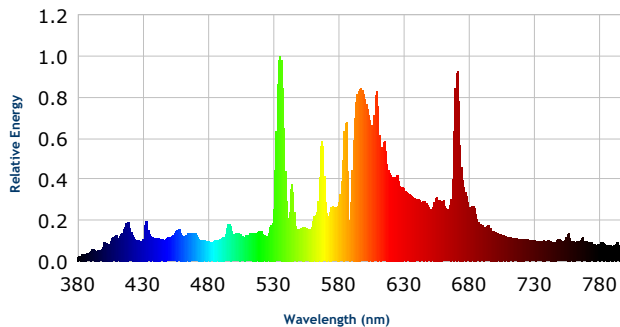

#### Lumen Maintenance

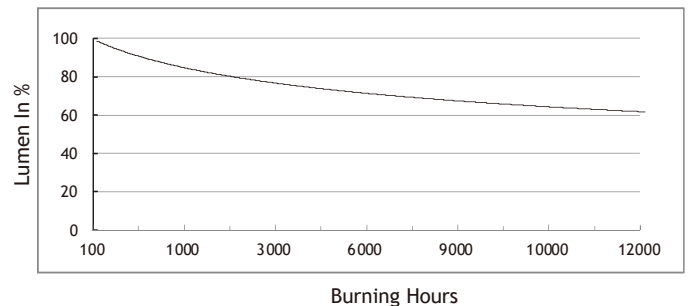

#### Warning

**“R” WARNING:** THIS LAMP CAN CAUSE SERIOUS SKIN BURN AND EYE INFLAMMATION FROM SHORTWAVE ULTRAVIOLET RADIATION IF THE OUTER ENVELOPE OF THE LAMP IS BROKEN OR PUNCTURED. DO NOT USE WHERE PEOPLE WILL REMAIN FOR MORE THAN A FEW MINUTES UNLESS ADEQUATE SHIELDING OR OTHER SAFETY PRECAUTIONS ARE USED. LAMPS THAT WILL AUTOMATICALLY EXTINGUISH WHEN THE OUTER ENVELOPE IS BROKEN OR PUNCTURED ARE COMMERCIALY AVAILABLE. Complies with USA Federal Standard 21 CFR 1040.30 and Canada Standard C.R.C., c. 1370.