

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

SKYWALK

LED ARCHITECTURAL RECESSED LUMINAIRE 3 CCT AND 3 POWER SELECTABLE

ORDERING INFORMATION

Order code: 69344
Model number: L3PNA-2LPS35P-Q/3C
UPC: 069549026629
Case quantity: 2
DLC unique ID: S-6H3EF2

PHYSICAL DATA

Length in. (cm): 2'X2'
Lens material: PMMA LED
Housing material: Aluminium
Mounting: Recessed

PERFORMANCE DATA

Watts (W): 25/30/35
Volts (VAC): 120-347
Color temperature (K)¹: 3 500/4 000/5 000
Lumen output (lm)²: 3 125/3 750/4 375
Efficacy (lm/W): 125
CRI: 83
Life L70 (h)³: 176 000
Tested LM-80 (h)³: 10 000
Dimming: 0-10 V
Power factor: >0.9
THD (%): <20
Frequency (Hz): 60
Surge protection (kV): 2Kv
Input current (A): 0.35
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %.

² Lumen values are derived from DLC reported data at 3 500 K. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

LUMEN SPECIFICATION TABLE

Watts (W)	3 500 K		4 000 K		5 000 K	
	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
25	3 141	126	3 224	129	3 164	127
30	3 745	125	3 865	129	3 806	127
35	4 298	123	4 449	127	4 311	123

DEFAULT PROGRAMMING

35 W / 4 000 K

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Not all products are qualified on the DLC QPL.
 To view our DLC qualified products, please
 consult the DLC Qualified Products List at
www.designlights.org/search.

ACCESSORIES (order separately)

Order code	Type	Compatible with
67164	Drywall kit	2'X2'


COMPATIBLE DIMMERS¹

Brand	Model
Leviton	DD710, IP710
Lutron	MS-Z101, NTSTV-DV, DVSTV
Legrand	RH4FBL3PTC

Dimming range: 10%-100%


¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

DIMENSIONS AND WEIGHT

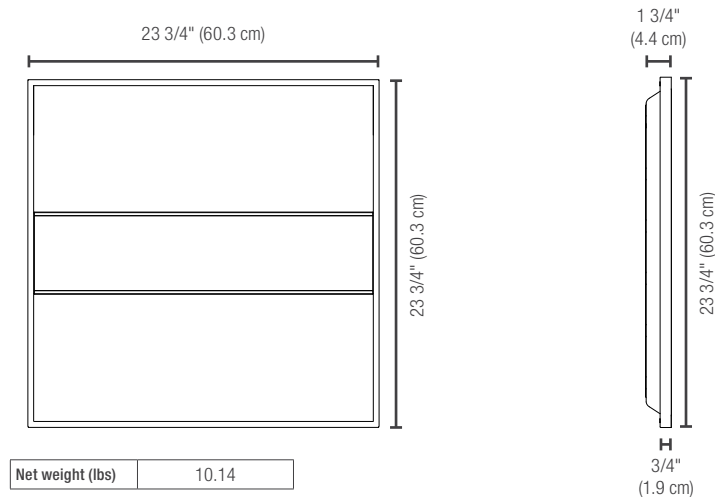PHOTOMETRIC DATA¹

69344 • L3PNA-2LPS35P-Q/3C • 35 W • 4 000 K • 4 448.7 lm

Polar candela distribution

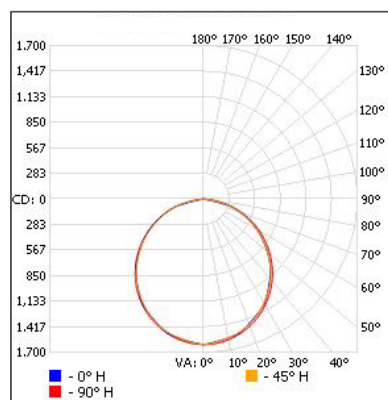

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	1 236.0	27.8
0-40	2 019.6	45.4
0-60	3 556.7	80
60-90	891.9	20
0-90	4 448.7	100

Illuminance at a distance

Center beam fc		Beam width	
2.0'	403.7	5.7'	6.0'
4.0'	100.9	11.5'	11.9'
6.0'	44.9	17.2'	17.9'
8.0'	25.2	23.0'	23.9'
10.0'	16.1	28.7'	29.8'

■ Vert. spread : 110.3°
■ Horiz. spread : 112.3°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.