

Individual Spec Sheet

SKYWALK

LED ARCHITECTURAL RECESSED LUMINAIRE 3 CCT AND 3 POWER SELECTABLE

ORDERING INFORMATION

Order code: 69345
Model number: L3PNA-4LPS50P-Q/3C
UPC: 069549026636
Case quantity: 2
DLC unique ID: S-MU3LKH

PHYSICAL DATA

Length in. (cm): 2'X4'
Lens material: PMMA LED
Housing material: Aluminium
Mounting: Recessed

PERFORMANCE DATA

Watts (W): 30/40/50
Volts (VAC): 120-347
Color temperature (K)¹: 3 500/4 000/5 000
Lumen output (lm)²: 3 750/5 000/6 250
Efficacy (lm/W): 125
CRI: 83
Life L70 (h)³: 176 000
Tested LM-80 (h)³: 10 000
Dimming: 0-10 V
Power factor: >0.9
THD (%): <20
Frequency (Hz): 60
Surge protection (kV): 2Kv
Input current (A): 0.5
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %.

² Lumen values are derived from DLC reported data at 3 500 K. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

LUMEN SPECIFICATION TABLE

| Watts (W) | 3 500 K | | 4 000 K | | 5 000 K | |
|--------------|----------------------|--------------------|----------------------|--------------------|----------------------|--------------------|
| | Lumen output (lm) | Efficacy (lm/W) | Lumen output (lm) | Efficacy (lm/W) | Lumen output (lm) | Efficacy (lm/W) |
| 30 | 3 754 | 125 | 3 864 | 129 | 3 840 | 128 |
| 40 | 5 000 | 125 | 5 193 | 130 | 5 084 | 127 |
| 50 | 6 219 | 124 | 6 487 | 130 | 6 288 | 126 |

DEFAULT PROGRAMMING

50 W / 4 000 K

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



ICES
005



Not all products are qualified on the DLC QPL.
 To view our DLC qualified products, please
 consult the DLC Qualified Products List at
www.designlights.org/search.

ACCESSORIES (order separately)

| Order code | Type | Compatible with |
|------------|-------------|-----------------|
| 63491 | Drywall kit | 2'X4' |


COMPATIBLE DIMMERS¹

| Brand | Model |
|---------|--------------------------|
| Leviton | DD710, IP710 |
| Lutron | MS-Z101, NTSTV-DV, DVSTV |
| Legrand | RH4FBL3PTC |

Dimming range: 10%-100%

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

DIMENSIONS AND WEIGHT

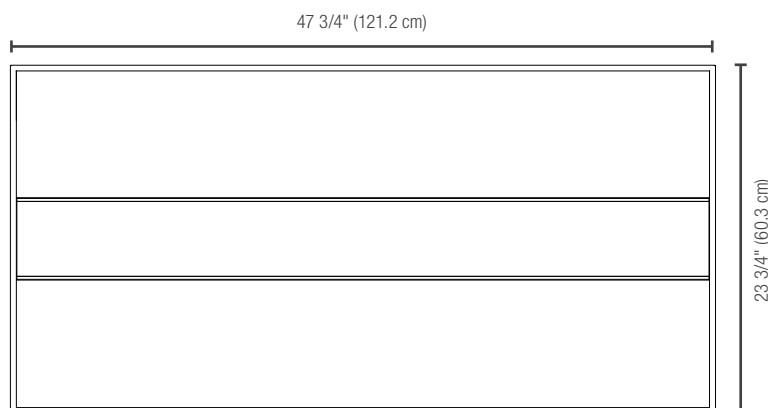


| | |
|------------------|-------|
| Net weight (lbs) | 16.09 |
|------------------|-------|

PHOTOMETRIC DATA¹

69345 • L3PNA-4LPS50P-Q/3C • 50 W • 4 000 K • 6 487.2 lm

Polar candela distribution

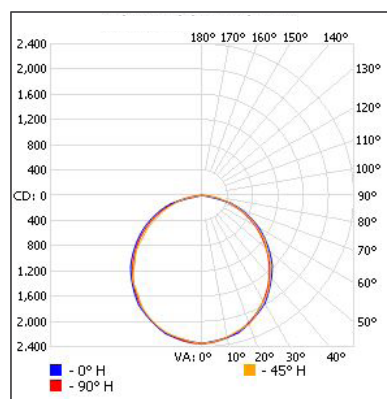

Zonal lumen summary

| Zone | Lumens | % Fixture |
|-------|---------|-----------|
| 0-30 | 1 804.3 | 27.8 |
| 0-40 | 2 951.2 | 45.5 |
| 0-60 | 5 198.0 | 80.1 |
| 60-90 | 1 289.2 | 19.9 |
| 0-90 | 6 487.2 | 100 |

Illuminance at a distance

| Center beam fc | | Beam width | |
|----------------|-------|------------|-------|
| 2.0' | 587.2 | 6.1' | 5.7' |
| 4.0' | 146.8 | 12.2' | 11.5' |
| 6.0' | 65.2 | 18.3' | 17.2' |
| 8.0' | 36.7 | 24.4' | 23.0' |
| 10.0' | 23.5 | 30.5' | 28.7' |

■ Vert. spread: 113.5°
■ Horiz. spread: 110.3°

¹ Complete IES files available on our website.

| Qty | Description | Price |
|-----|-------------|-------|
| | | |

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.