

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

T5 - BALLAST COMPATIBLE LED LINEAR TUBES

ORDERING INFORMATION

Order code: 69316
Model number: T5/S3/25W/850/46/STD/SMX
UPC: 069549026261
Case quantity: 25
DLC Unique ID: S-KIDVQ1

PHYSICAL DATA

Shape: T5
Base: G5
Material: Glass
Length mm (in): 1 168 (46)

PERFORMANCE DATA


Installation Method: Ballast compatible
Bare Lamp Watts (W): 25
NBF Wattage (W): 28
Volts (VAC): 120-277/347
Color temperature (K)¹: 5 000
Lumen output (lm)²: 3 500
CRI: 82
Life L70 (h)³: 50 000
Beam Angle: 210°
Dimming: Depends on the ballast
Power factor: 0.90
Frequency (Hz): 50/60
Operating temp. range: -20°C to 45°C (-4°F to 113°F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

DIMENSIONS

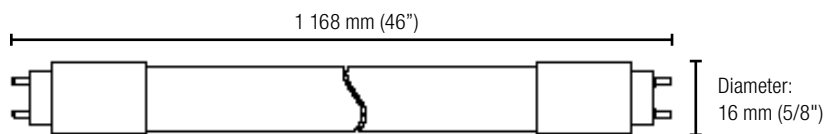

5 yrs
warranty

6
damp
location

ICES
005

not suitable for
enclosed
fixture

RoHS

UL
CERTIFIED

FC

DLC
LISTED

NSF

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.