

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

L1LEH GEN. 2

LINEAR LED HIGH BAY LUMINAIRE 3 CCT AND 3 POWER SELECTABLE WITH SENSOR RECEPTACLE

ORDERING INFORMATION

Order code: 69778
Model number: L1LEH-24PS160-Q-3C
UPC: 069549030008
Case quantity: 1
DLC Premium unique ID: S-N5RQKR

PHYSICAL DATA

Dimension in. (cm): 24.80" x 14.96" x 2.16" (63.00 cm x 38.00 cm x 5.48 cm)
Lens material: Frosted polycarbonate
Housing material: White powder coated steel
Mounting: Suspended, surface or pendant

Included with fixture: 6' power cord and dimming cables, suspension kit: V-hooks and 3.25' chains (2 pcs each)

PERFORMANCE DATA

Watts (W): 110/130/160
Volts (V AC): 120-347
Color temperature (K)¹: 3 500/4 000/5 000
Lumen output (lm): 17 600 - 24 800
Efficacy (lm/W): 150-165
CRI: 80+
Life L70 (h)²: 54 000
Tested LM-80 (h)²: 9 000
Dimming: 0-10 V
Power factor: >0.9
THD (%): <20
Surge protection (kV): 6
Operating temp. range: From -20°C (-4°F) and up to 65°C (149°F) on certain wattages. Consult Lumen and Operating Temperature Specification Table for more details

¹ Typical colour temperature range: +/- 5 %.

² Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.


LUMEN AND OPERATING TEMPERATURE SPECIFICATION TABLE

Watts (W)	3 500 K		4 000 K		5 000 K		Max. operating temperature (surface mount)	Max. operating temperature (suspended mount) ¹
	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)		
110	17 600	160	18 150	165	17 600	160	50°C	65°C
130	20 150	155	20 800	160	20 150	155	45°C	55°C
160	24 000	150	24 800	155	24 000	150	40°C	50°C

¹ Suspended 18" from ceiling

DEFAULT PROGRAMMING

160 W / 4 000 K

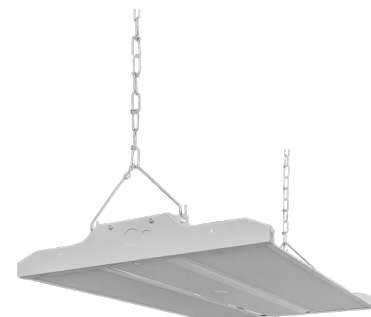

3 500/4 000/5 000 K



power selectable



quick ship



LED fixture



dimmmable



damp location




ICES 005



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

DIMENSIONS AND WEIGHT

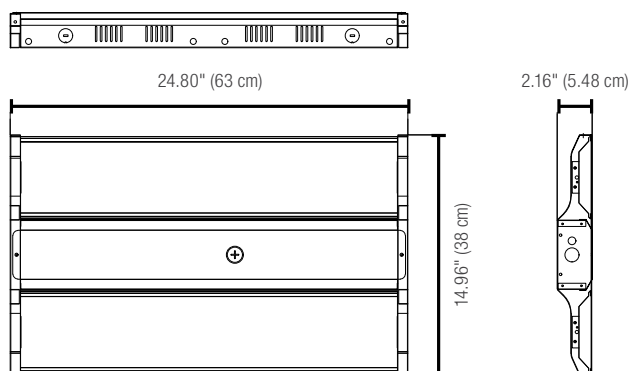

Net weight (lbs)	10.36
------------------	-------

ACCESSORIES (order separately)

Order code	Type
68676	3.25 FT Suspension Chain Kit (set of 2)
68907	V-Hooks (set of 2)
68910	Surface Mount Bracket (set of 2)
68911	Conduit Mount Kit
68912	Wire guard 2ft x 15.5in
69444 ^{1, 2}	External High Frequency Sensor OSI-EFS06R
69640 ^{1, 2}	External PIR Sensor OSI-EFS07-AUX
69080	Remote control OSI-RM51 for motion sensors
70247	External 10kV surge protector
70248	External 20kV surge protector

¹ Maximum ambient temperature for sensors is 55°C

² To change factory settings, purchase 69080 remote (sold separately)

SMART ACCESSORIES (sold separately)


Order code	Type
69651 ¹	Genio Bluetooth® Mesh Internal PIR sensor OSI-PIR106

¹ Maximum ambient temperature for sensors is 65°C

PHOTOMETRIC DATA¹

69778 • L1LEH-24PS160-Q-3C • 110 W • 4 000 K • 17 141 lm

Polar candela distribution

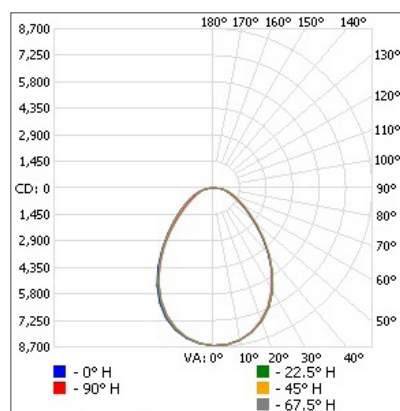


Zonal lumen summary

Zone	Lumens	% Fixture
0-30	6 268.7	36.6
0-40	9 627.1	56.2
0-60	14 497.5	84.6
60-90	2 643.2	15.4
70-100	1 241.8	7.2
90-120	0	0
0-90	17 140.6	100
90-180	0	0
0-180	17 140.6	100

Illuminance at a distance

Center beam fc	Beam width
1.7'	2 982
3.3'	791
5.0'	345
6.7'	192
8.3'	125
10.0'	86.2
3.0'	3.0'
5.8'	5.7'
8.8'	8.6'
11.7'	11.5'
14.6'	14.3'
17.5'	17.2'

 Vert. spread : 82.5°
 Horiz. spread : 81.5°


¹ Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

PHOTOMETRIC DATA¹

69778 • L1LEH-24PS160-Q-3C • 130 W • 4 000 K • 20 260 lm

Polar candela distribution

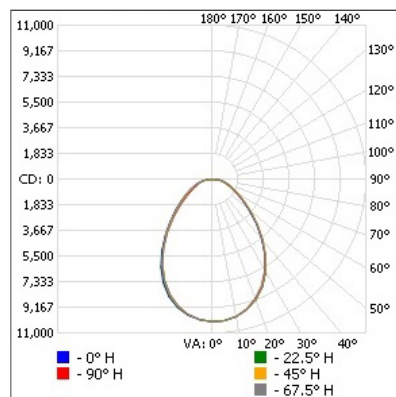

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	7 409.5	36.6
0-40	11 379.0	56.2
0-60	17 135.7	84.6
60-90	3 124.2	15.4
70-100	1 467.8	7.2
90-120	0	0
0-90	20 259.8	100
90-180	0	0
0-180	20 259.8	100


Illuminance at a distance

Center beam fc		Beam width	
1.7'	3 525	3.0'	2.9'
3.3'	935	5.8'	5.7'
5.0'	407	8.8'	8.6'
6.7'	227	11.7'	11.5'
8.3'	148	14.6'	14.3'
10.0'	102	17.5'	17.2'

■ Vert. spread: 82.5°
■ Horiz. spread: 81.5°

69778 • L1LEH-24PS160-Q-3C • 160 W • 4 000 K • 24 935 lm

Polar candela distribution

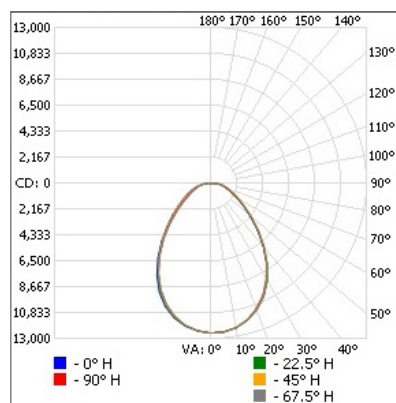

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	9 119.3	36.6
0-40	14 004.8	56.2
0-60	21 089.8	84.6
60-90	3 845.1	15.4
70-100	1 806.5	7.2
90-120	0	0
0-90	24 934.9	100
90-180	0	0
0-180	24 934.9	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	4 338	3.0'	2.9'
3.3'	1 151	5.8'	5.7'
5.0'	502	8.8'	8.6'
6.7'	279	11.7'	11.5'
8.3'	182	14.6'	14.3'
10.0'	125	17.5'	17.2'

■ Vert. spread: 82.5°
■ Horiz. spread: 81.5°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.