

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

L2WMG

LED WRAPAROUND

5 CCT and 3 Power Selectable

ORDERING INFORMATION

Order Code: 70043
Model Number: L2WMG-24PS-Q/5C/CHOICE
UPC: 069549031753
Case Quantity: 4
DLC Unique ID: S-X7JN60

PHYSICAL DATA

Length in. (cm): 24.5 (62.1)
Lens Material: Frosted PMMA
Housing Material: Metal
Mounting: Surface wall and ceiling mount

PERFORMANCE DATA

Watts (W): 16/20/24
Volts (V AC): 120-347
Color Temperature (K)¹: 3 000/3 500/4 000/4 500/5 000
Lumen Output (lm)²: 1 840/2 300/2 760
Efficacy (lm/W): 115
CRI: 80+
Life L70 (h)³: >102 000
Tested LM-80 (h)³: 17 000
Dimming: 0-10 V
Power Factor: 0.90
THD (%): <20
Frequency (Hz): 50/60
Surge Protection (kV): 2.5
Input Current (A): 0.195
Operating Temp. Range: -20 °C to 50 °C (-4 °F to 122 °F)

¹ Typical colour temperature range: +/- 5 %.

² Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

LUMEN SPECIFICATION TABLE

Watts (W)	3 000 K		3 500 K		4 000 K		4 500 K		5 000 K	
	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
16	1 840	115	1 840	115	1 840	115	1 840	115	1 840	115
20	2 300	115	2 300	115	2 300	115	2 300	115	2 300	115
24	2 760	115	2 760	115	2 760	115	2 760	115	2 760	115

DEFAULT PROGRAMMING

24 W / 4 000 K

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.


Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.


DIMENSIONS AND WEIGHT

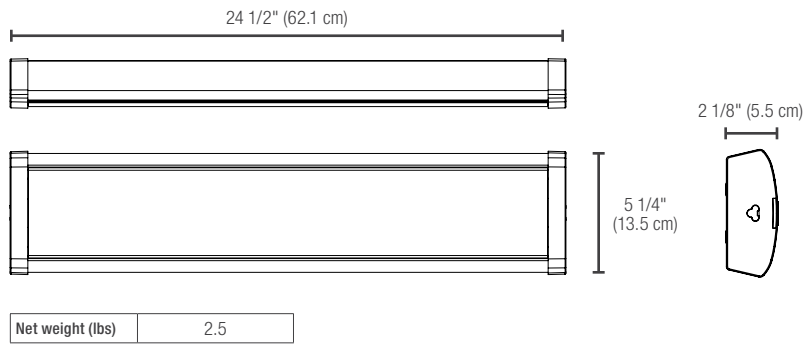

PHOTOMETRIC DATA¹

70043 • L2WMG-24PS-Q/5C/CHOICE • 24 W • 4 000 K • 2 938.1 lm

Polar candela distribution

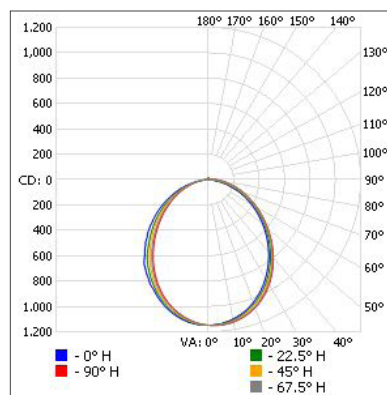

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	863.5	29.4
0-40	1 382.1	47
0-60	2 322.1	79
60-90	567.1	19.3
70-100	264.1	9
90-120	26.2	0.9
0-90	2 889.2	98.3
90-180	48.9	1.7
0-80	2 938.1	100

Illuminance at a distance

Center beam fc		Beam width	
2.0'	287.0	4.9'	4.6'
4.0'	71.7	9.8'	9.1'
6.0'	31.9	14.6'	13.7'
8.0'	17.9	19.5'	18.3'
10.0'	11.5	24.4'	22.8'

■ Vert. spread: 101.3°
■ Horiz. spread: 97.5°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.