

Project: _____

Type: _____

Drawn by: _____ Catalogue #: _____

Date: _____

Individual Spec Sheet

LED LAMPS

Filaments

ORDERING INFORMATION

Order code: 70319
Model number: ST19/S4/7W/27K/V/FIL/STD
UPC: 069549033740
Case quantity: 50

PHYSICAL DATA

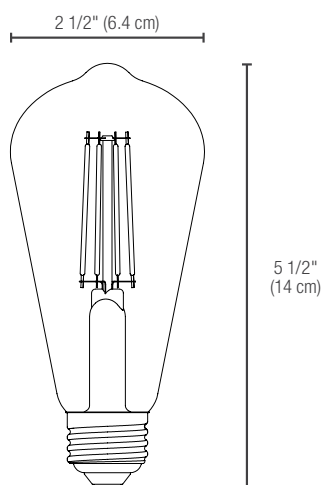
Shape: ST19
Base: E26
Finish: Clear
Filament Type: Vertical

PERFORMANCE DATA

Watts (W):	7	Beam angle (°):	300
Traditional equivalent (W):	75	Power factor:	0.7
Volts (V AC):	120	Input Current (mA):	80
Color temperature (K):¹	2 700	Frequency (Hz):	60
Lumen output (lm):²	800	Housing Material:	Glass
Efficacy (lm/W):	114	Application:	Indoor and outdoor
CRI:	80	Operating temp. range:	- 30 °C / - 22 °F to 40 °C / 104 °F
Dimming:	Forward	Warranty:	2 Years
Life L70 (h):³	15 000		

¹ Typical colour temperature range: +/- 5 %.² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

DIMENSIONS

COMPATIBLE DIMMERS¹

Brand	Model
LUTRON	HCL453P, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, MACL-153P
COOPER	DAL06P, SAL06P3
LEVITON	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, DDMX1
LEGRAND	RH730PTUTC

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

Dimming performance might be impacted when using the above dimmers with only one lamp. Full performance achieved when using two or more lamps.



2_{yrs}
warranty

**enclosed
 fixture**

**6'
 wet
 location**

**dimable
 fixture**

**ICES
 005**



This lighting equipment meets requirements of ICES-005 issue 5 - class B for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.