

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

VIVIO GEN. 2

4" LED DOWNLIGHT WITH DUAL INSTALLATION

ORDERING INFORMATION

Order Code: 70570
Model Number: VDL4R-G2-08A-5C
UPC: 069549035621
Case Quantity: 24

PHYSICAL DATA

Size in. (cm): 4" (10.16)
Shape: Round
Finish: White
Lens Type: Frosted Glass

PERFORMANCE DATA

Watts (W): 8
Volts (VAC): 120
Colour Temperature (K)¹: 2 700/3 000/3 500/4 000/5 000
Lumen Output (lm)²: 720
Lumen per Watts (lm/W): 90
CRI: 90+
Life L70 (h)³: 50 000
Beam Angle (°): 110
Environment: Wet location
THD (%): 20
Power Factor: >0.9
Frequency (Hz): 50/60
Operating Temp. Range: -30 °C to 40 °C (-22 °F to 104 °F)
Dimmable: Phase cut (ELV / Triac)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

LUMEN SPECIFICATION TABLE

Watts (W)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K	
	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
8	706	88	739	92	776	97	778	97	760	95

DEFAULT PROGRAMMING

2 700K




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE ACCESSORY

Order code	Model number	Type
68032	VDL4R-TRIMBK	Magnetic trim

DIMENSIONS AND WEIGHTS

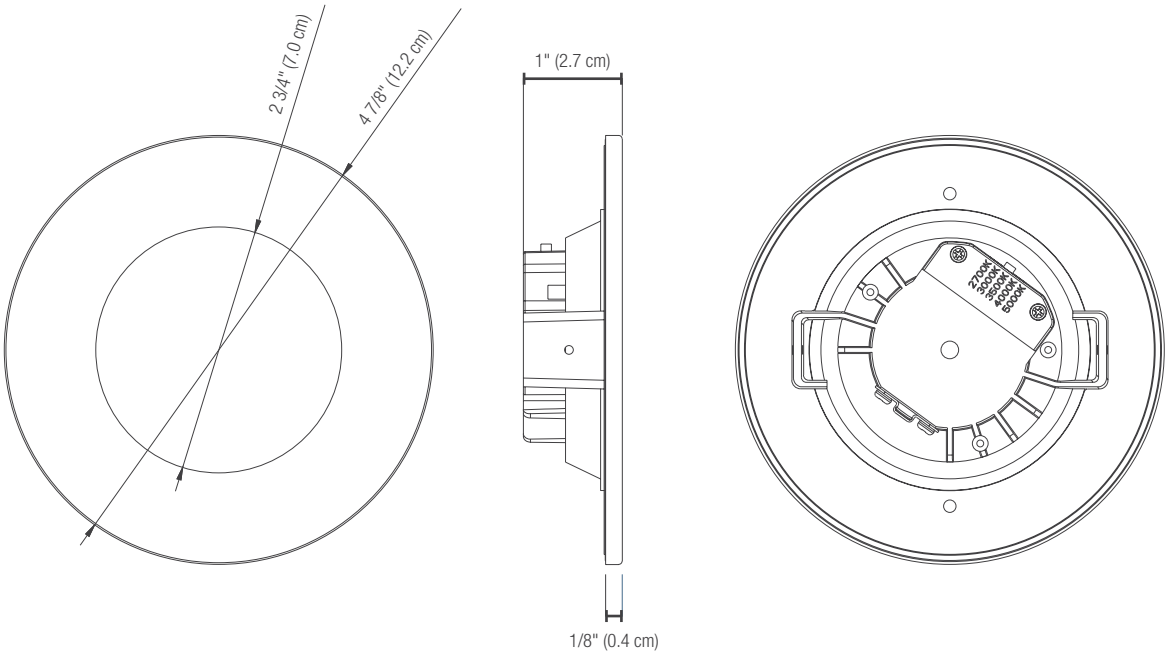

Net weight (lbs)	0.5
------------------	-----

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.