

WARNINGS



WARNINGS

When using electrical equipment, basic safety precautions should always be followed, including the following:

- All electrical connects must be in accordance with local codes, ordinances, and the Canadian National Electrical Code.
- Disconnect power before performing work on electrical equipment.
- Read and follow all safety instructions.
- Do not let wires touch hot surfaces.
- Do not install in hazardous locations or near gas or electric heaters.
- The use of accessory equipment not recommended by manufacturer may cause an unsafe condition and will void the unit's warranty.


- Do not use this equipment other than its intended purpose.
- Servicing of this equipment should be performed by qualified service personnel.
- Save these instructions for future reference.
- Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
- For indoor use only.
- Allow battery to charge for 24 hours before first use.

IMPORTANT

The battery in this unit may not be fully charged at the time the electrical connects are made. Let the battery charge for at least 24 hours. Then normal operation of this unit should take effect. To check, press the "TEST" button. The light inside the unit should turn on. The lamps, when used according to these instructions with this equipment, are in accordance with the requirements of CSA standard C22.2 No. 141.

ATTENTION RECEIVING DEPARTMENT: Note actual fixture description of any shortage or noticeable damage on delivery receipt. File claim for common carrier (LTL) directly with carrier. Claims for concealed damage must be filed within 15 days of delivery. All damaged material, complete with original packaging must be retained.

WIRING DIAGRAM

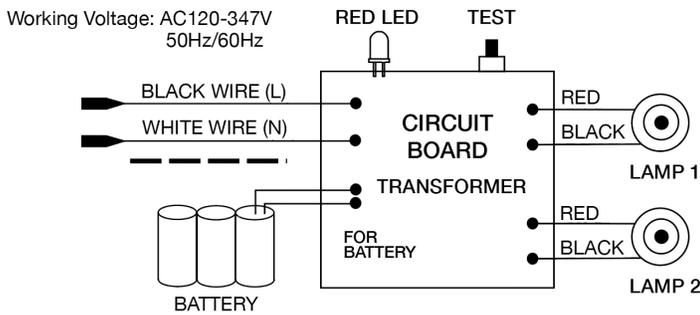

INSTALLATION INSTRUCTIONS

1. Push round retaining tabs located on the bottom of the fixture to release the back plate (Fig. 1).
2. Pull wires through the back plate, then connect the back plate to a recessed junction box using the universal junction box knockouts (Fig. 2).
3. Make wiring connections according to the wiring diagram. Ensure that the internal battery is connected to the circuit board (Fig. 3).
4. Push main fixture body back on to the back plate, ensuring that the round retaining tabs lock the fixture in place (Fig. 2).
5. Adjust lamp heads to desired position (Fig. 4).

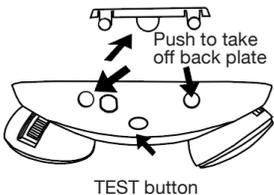


Fig. 1

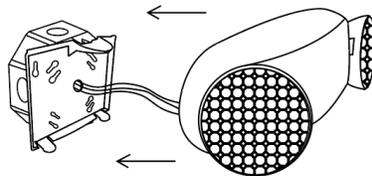


Fig. 2

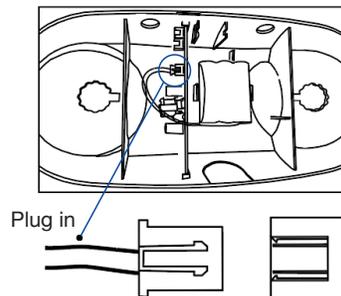


Fig. 3



Fig. 4

OPERATION INSTRUCTIONS

1. To test, press the TEST switch. The DC lamps will come on.
2. Release the TEST switch. DC lamps will turn off.
3. During an electrical power failure the lights will automatically come on for a minimum of 120 minutes.